(ormelius)

CARBONATOR BALANCE CONTROL




FEATURES

Intelligent features - Full cabinet provides quiet operation, protection of balance control mechanism, and sanitation confidence, while allowing easy access for greater serviceability

Intelligent features - 1/3 HP motor and 100 GPH pump for enhanced performance

Ease of use - Incorporates improved life single pole, single throw switches for simple fixed liquidifferential. Liquid levels are factory set to ensure consistent operation and eliminate need for field adjustments

Stability - Rubber feet provide stability and help ensure quiet operation **Flexible** - Standard floor or wall mount

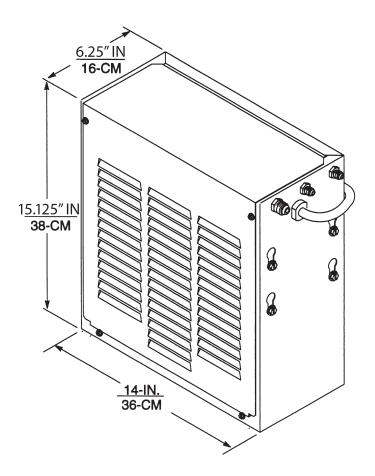

PART NUMBER	DESCRIPTION
416411000	Complete Cornelius Carbonator, 115 V / 6.8 Amps
496411000	Complete Cornelius Carbonator, 220 V / 50 Hz, 230 V / 60 Hz
1621	Complete Cornelius Carbonator with vent-to-atmosphere check valve

TECHNICAL SPECIFICATIONS

SHIPPING WEIGHT	30 lb (14 kg)
CARBONATOR MOTOR	1/3 HP
CARBONATOR PUMP	100 GPH
OPERATING PRESSURE	125 psi maximum

INLET CONNECTIONS CO₂: 0.25" (0.64 cm) male flare

male flare Water: 0.375" (0.95 cm) male flare/ 0.25" (0.64 cm) male flare on carbonated water outlet

(Cornelius)

© 2014 CORNELIUS

CATG8429-0214

IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255

OUTSIDE THE U.S.A. Ph: 763.488.8200 Email: webmaster@cornelius.com

AGENCY LISTINGS

101 Broadway Street West Osseo, MN 55369 www.cornelius.com

For more information or to place an order, contact your sales representative or authorized distributor.