

## **VIPER™ ELITE CLASSIC**

4 FLAVOR FROZEN DISPENSER



# **FEATURES**

Building on nearly 50 years of experience, Viper Elite raises the bar in frozen with superior engineering and quality.

**Enhanced Reliability** – Increase uptime with the most reliable FCB dispenser on the market

**Syrup Flexibility** – Pressure transducers ensure you'll be able to perform as syrups change in the future

**Expand Drink Portfolios** – Individual barrel flexibility (FCB/FUB) and profile settings

**Intelligent Defrost**™ – Patented adaptive defrost keeps you up and running during peak demand so you never miss a sale

**Information at your fingertips** - Quickly access manuals and easy-to-follow staff and service videos via QR code

**C3 Technology** – Cooling, carbonation, and controls provide unmatched drink profile consistency, builds repeat sales and minimizes syrup usage

**Programmable sleep mode** – Conserves energy in off hours

**Technician designed** – Reduced maintenance and service times

ADA Compliant - Stainless push handle valve

### **MODELS**

PART NUMBER	DESCRIPTION
621460142	Viper Elite Classic 4 flavor, 230/60Hz, SPH Valve, Tall Merchandiser
621460042	Viper Elite Classic 4 flavor, 230/60Hz, Motorman Valve, Tall Merchandiser
621460041	Viper Elite Classic 4 flavor, 230/60Hz, Motorman Valve, Short Merchandiser

SPH stands for Stainless Push Handle. For FUB applications, Motorman valves are recommended.

#### **ACCESSORIES**

PART NUMBER	DESCRIPTION
629087406	Leg kit, 4" legs adjustable to 5.25"
620046556	Viper 4 flavor cart, stainless steel
620046477	Viper 4 flavor generic graphic for tall merchandiser
620047323	Viper 4 flavor generic graphic for short merchandiser
620042868	Generic flavor card set (includes 18 flavors)
325674000	Buck and boost transformer

Refer to installation accessory guideline for complete list.

### **TECHNICAL SPECIFICATIONS**

ELECTRICAL RATINGS...... 230V +/- 15V 60Hz, 30a, single phase

(includes 8ft. power cord NEMA L6-30P molded plug connection)

PRESSURE REQUIREMENTS ... CO2 = 75 psig

Water = 25 min. psig dynamic

DRAW CAPACITY ...... 75-82 oz/min. continuous, alternating

barrels @ 75°F ambient

REFRIGERATION............ 19,000 BTU, R404A

MINIMUM CLEARANCE

REQUIRED...... Top: 12"

Each side: 2" or Back: 2"

UNIT DIMENSIONS . . . . . . . . . . . . . 29"W x 32.5"D x 43.7"H


(tall merchandiser) 29"W x 32.5"D x 37"H (short merchandiser)

GRAPHIC CARD DIMENSIONS... 28.75"W x 18.75"H

(tall merchandiser) 28.75"W x 11.79"H (short merchandiser)

FLAVOR CARD DIMENSIONS.... 6.5"W x 4"H

SHIPPING WEIGHT . . . . . . . . . 500 lbs; cart 200 lbs

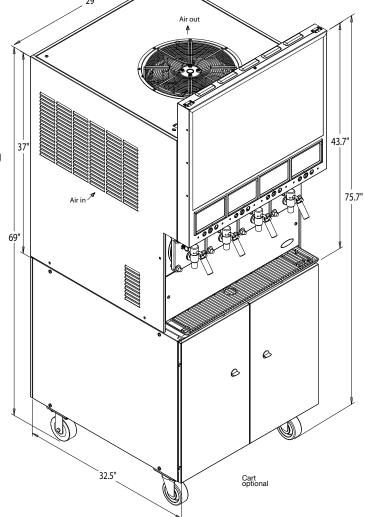



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius-usa.com