Ice-O-Matic

ICE0400/0405/0406 - Cube Ice Maker



ICE0406 on B55

Features

- Space saving 20" (508 mm) tall design.
- Produces up to 529 lbs (240 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- · Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Free Optional top air discharge available for maximum ice production in a small space.

Options & Accessories

Water Filters							
Ice Machine		Inline					
Model	System	Replacement	System				
ICE0400	IFQ1	IOMQ (1)	IFI4C / IFI8C				
ICE0405	IFQ1	IOMQ (1)	IFI4C / IFI8C				
ICE0406	IFQ1	IOMQ (1)	IFI4C / IFI8C				

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years Parts and Labor on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form



Full Cube						
W x D x H (in)	7/8 X 7/8 X 7/8					
W x D x H (mm)	22 x 22 x 22					
Half Cube						
W x D x H (in)	7/8 x 7/8 x 3/8					
W x D x H (mm)	22 x 22 x 10					

Bin Chart

Kits for Combining Wider Bins with Smaller Models

		Ice Storage Bins								
	Model No. Capacity Width	B25 255 lbs (116 kg) 30 in (762 mm).	B40 365 lbs (165 kg) 30 in (762 mm)	B42 374 lbs (170 kg) 22in (559 mm)	B55 556 lbs (252 kg) 30 in (762 mm)	B100 927 lbs (420 kg) 48 in (1219 mm)	B120 1193 lbs (541 kg) 48 in (1219 mm)	B150 1499 lbs (679 kg) 60 in (1524 mm)	B170 1866 lbs (846 kg) 60 in (1524 mm)	
Kits	ICE0400	Kit not required	Kit not required	N/A	Kit not required	KBT 5	Filler Kit Required	Filler Kit Required	Filler Kit Required	
	ICE0405	Kit not required	Kit not required	N/A	Kit not required	KBT 5	Filler Kit Required	Filler Kit Required	Filler Kit Required	
	ICE0406	Kit not required	Kit not required	N/A	Kit not required	KBT 5	Filler Kit Required	Filler Kit Required	Filler Kit Required	

^{*} See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.


















Ice-O-Matic

Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, %" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, %".
- **D.** Electrical connection junction box.




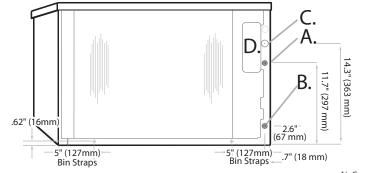

Air Cooled

Water Cooled

- A. Ice maker potable water in, %" FPT.
- **B.** Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, %".
- **D.** Electrical connection junction box.
- E. Condenser water in, %" FPT.
- F. Condenser water out, ½ " FPT.

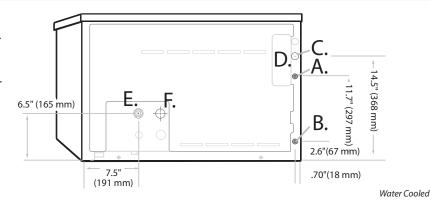

Operating Requirements

	Minimum	Maximum			
		60 Hz	50Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)		
Water Temp.	40°F (4.4°C)	100°F (38°C)	110°F (43°C)		
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)			

Dimensions

All Models						
W x D x H (inches)	30 x 24 x 20					
WxDxH(mm)	762 x 610 x 508					

Specifications

		Ice Production per 24hrs		Water Usage		kWH Used per 100 lbs				
Model Number Cond. Unit			90°F air/ 70°F water	, , ,	gallons per 100 lbs of Ice 90°F air/70°F water		Voltage	Min. Circuit	Fuse	Approx. BTUs
	Cond. Unit		lbs (kg)	Potable	Condenser	90°F air/ 70°F water	Characteristics	Ampacity	Size	per hour
ICE0400A ★	Air	505 (230)	368 (167)	24.4	-	6.1	115/60/1	17.1	20	7,835
ICE0400W	Water	496 (225)	407 (185)	28.8	148	4.6	115/60/1	12.9	15	7,563
ICE0400T★	Air.	499 (227)	357 (162)	25.0	-	6.3	115/60/1	17.1	20	7,757
ICE0406A	Air	529 (240)	358 (162)	24.0	-	6.0	208-230/60/1	8.0	15	7,523
ICE0406W	Water	523 (238)	439 (200)	28.9	132	4.2	208-230/60/1	6.4	15	7,770
ICE0405A	Air	498 (226)	366 (166)	22.7	-	6.0	230/50/1	8.2	16	7,735
ICE0405W	Water	525 (239)	440 (200)	26.5	166	4.7	230/50/1	6.2	16	8,213

NOTES:

Number of Wires: 3 (including ground)

Approx. Shipping Weight /bs (kg): ICE0400A 165 (75) • ICE0400W 165 (75) • ICE0400W 165 (75) • ICE0400B 165 (75) • ICE0406A 165 (75) • ICE0406W 165 (75) • ICE0405W 165

Refrigerant Type: R404A

★ ENERGY STAR qualified machine.

Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates

11100 E. 45th Avenue Denver, CO 80239 Phone: 1. 866. PURE. ICE Fax: 303. 371. 6296 www.iceomatic.com

Rev: Part: A-01/09 1005