

QUEST ELITE 4000

4-FLAVOR POST-MIX
DISPENSER

Also Included!



Multi-Panel Merchandiser Option: 721404101JU2

Unit Includes iced tea, lemonade, cold brew and a variety of latte graphics!



Single-Panel Merchandiser Option: 721404101JU1 Unit Includes juice graphic!



FEATURES

Wide product/ratio capability – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

Frost-free refrigeration compartment – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 14-16lb ice bank – Provides cold drinks during peak demand


Patented mixing system – Delivers consistent quality drinks with no stratification, slugging or dripping


LED illuminated graphics – Eliminates lost sales due to 'lights out' and reduces life costs

Narrow footprint – Conserves counter space Easy to service – Modular component design and ease of access speeds service

'Sold out' indication – Alerts operator to product out condition and maximizes sales

Flexible Merchandiser – Option of single-panel or multi-panel merchandiser

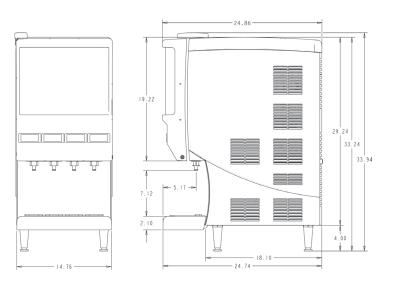

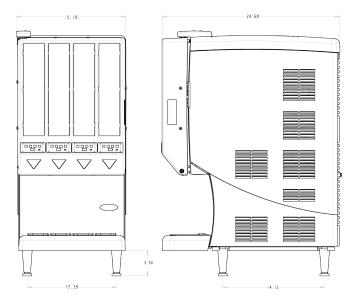

PART NUMBER	DESCRIPTION
721414201JU1	Quest Elite 4 flavor, illuminated, flush, push button 230/50, single-panel merch.
721414211JU1	Quest Elite 4 flavor, illuminated, flush, portion control 230/50, single-panel merch.
720404101JU1	Quest Elite 4 flavor, illuminated, non-flush, push button 115/60, single-panel merch.
721404101JU2	Quest Elite 4 flavor, illuminated, non-flush, push button 115/60, multi-panel merch.
729011003	Extended Splash Panel Kit for Pitchers/Carafes
720401107	Refillable Concentrate Reservoir 3.5 L
729011152	Cup Locator
729011125	Bag-In-Box Option Kit
729011220	Portion Control Kit - 4 Flavor
729011183	Extender Nozzle Kit

TECHNICAL SPECIFICATIONS

R-134a refrigerant 6.3 oz (180 g)

CABINETRY High impact plastic cabinetry

with stainless steel front panel

DISPENSER DIMENSIONS 29.3"H x 15"W x 24.3"D

(74.4 cm x 37.5 cm x 61.7 cm)

WEIGHT Dry: 120 lb (54.4 kg)

Operating: 185 lb (83.9 kg)

RECOMMENDED CLEARANCE . . Back: 4" (10.16 cm)

Top: 12" (34.8 cm)

Sides: 1" (2.54 cm)

WATER CONNECTION 0.375" (0.95 cm) SAE male

flare SAE fitting on dispenser

CONCENTRATE STORAGE..... Four 3.5 L bottles

WATER SUPPLY REQUIREMENTS

OPTIMUM SUPPLY SPECIFICATION . . 50psi(3.4 bar) flowing 3oz/sec

MAXIMUM STATIC PRESSURE .. 60psi (4.1 bar)

MINIMUM STATIC PRESSURE . . . 30psi (2.1 bar)

For water pressure exceeding the optimum supply specification, flow control set at 50psi is recommended

COOLING...... Three 12 oz drinks/min

(355 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water, and 41°F (4°C) concentrate w/o

exceeding a 40°F (4°C)

FLOW RATE..... Adjustable water flow rate

from 1-2.2 oz/sec

AGENCY LISTINGS









IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255

OUTSIDE THE U.S.A. Ph: 763.488.8200 Email: webmaster@cornelius.com 101 Broadway Street West Osseo, MN 55369 www.cornelius-usa.com