



Flow Reversal Valve
(see accessories section)

STANDARD MODEL NUMBERS

Model Number	Product Inlet Fitting	Product Outlet Fitting	Gas Inlet Fitting
G56-1202	10 - 13 mm (3/8"-1/2") Barbed Straight Plastic (Polypropylene)	10 - 13 mm (3/8"-1/2") Barbed Straight Plastic (Polypropylene)	1/4" (6.35 mm) CO2 Shutoff Brass
G56-1162	10 - 13 mm (3/8"-1/2") Barbed Straight Plastic	10 - 13 mm (3/8"-1/2") Barbed Elbow Plastic	1/4" (6.35 mm) CO2 Shutoff Brass

SPECIFICATIONS

Pump Design:	Positive Displacement, Double Diaphragm
Power Source:	CO ₂ , Nitrogen or Compressed Dry Filtered Air
Materials of Construction (wetted parts):	Polypropylene, Santoprene®, EPDM, AISI 304 Stainless Steel
Fluid Temperature Limits:	30° - 120° F (1.1° - 49° C)
Weight:	1.24 lbs. (0.56 kg.)
Dimensions:	5.27" H x 3.21" W x 4.58" D (133.8 mm x 81.5 mm x 116.3 mm)
Displacement:	3.2 oz. (91 ml) per cycle
Self Priming:	Up to 10 ft. (3.05 m)
Operating Pressure:	10 psi (0.7 bar) min. / 90 psi (6.2 bar) max.
Liquid Inlet Pressure:	30 psi (2.1 bar) max.
Flow Rate:	5 GPM (18.9 LPM) - Open Flow
Approvals:	CE, SK, NSF Standard 18
Life / Mean Time:	70,000 gallons (265,000 l)
Warranty:	3 Years

® A registered trademark of Monsanto Co.


G56 Series

APPLICATIONS

- Dispense beer from a keg, cask or brew kettle.
- Both long or short draw systems.

SPECIAL FEATURES

- Air compressors can be used to pressurize the beer pumps.
- Cost effective; no need for mixed gases or gas blenders.
- The beer pump increases the pressure in the product dispense line, which ensures that the inherent gas in the solution (beer) cannot break out.
- Smaller I.D. tubing can be used in some installations, which reduces the amount of beer wasted when cleaning lines.
- The air/gas used to power the pump never comes in contact with the beer, thus providing protection from flat or tainted beer due to impure air contamination or oxidation.
- Capable of traversing up to 800 feet (244 m), horizontally through a single line.
- Capable of delivering beer up to 10 stories (30 m), vertically through a single line.
- Pump can also be utilized to aid in beer line cleaning through wall mounted cleaning sockets.
- Infinitely variable to suit all runs and rises.
- Can dispense to multiple faucets (up to 5) from a single keg or keg series. This will cut walk-in cooler clutter by lowering the number of kegs on tap at one time which promotes product quality/freshness.
- Feeds up to three faucets through a single line.

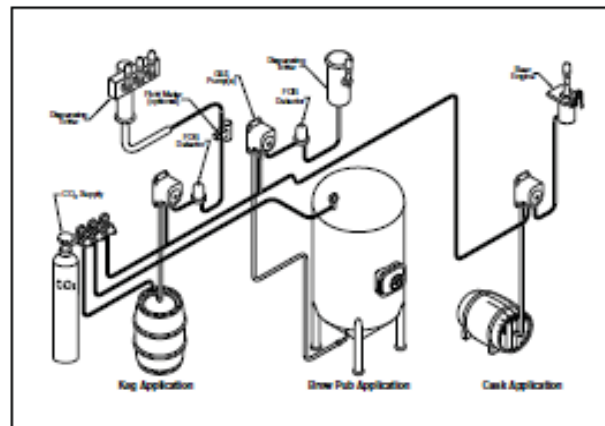

The above graphics and specifications were copied from the 2009 Flojet Product Catalog and is unedited. As a distributor for Flojet, we are providing the product details as provided by the manufacturer.