

### G58 Series

For Juice Concentrates and Condiments

#### APPLICATIONS

- Designed for dispensing BIB syrups, for juice concentrates and condiments which have pulp, particulate or are highly viscous (up to 1/16" or 1.6 mm).


#### SPECIAL FEATURES

- Enlarged diameter check valves, capable of passing pulp and particulate easily
- Highest flow rate available
- High CO2 inlet pressure capability for long runs - up to 90 psi (6.2 bar)
- Ultimate performance and reliability with extended service life
- Built-in auto shutoff, automatically shuts off pump when bag is empty and restarts when a full bag is connected
- Quiet operation
- Easy installation with all quick disconnect ports
- High altitude shut-off also available



#### STANDARD MODEL NUMBERS

Model Number	Product Inlet Fitting	Product Outlet Fitting	Gas Inlet Fitting
G58-1022	3/8" (9.52 mm) Barbed Straight Stainless Steel	3/8" (9.52 mm) Barbed Straight Stainless Steel	1/4" (6.35 mm) CO2 Shutoff Brass

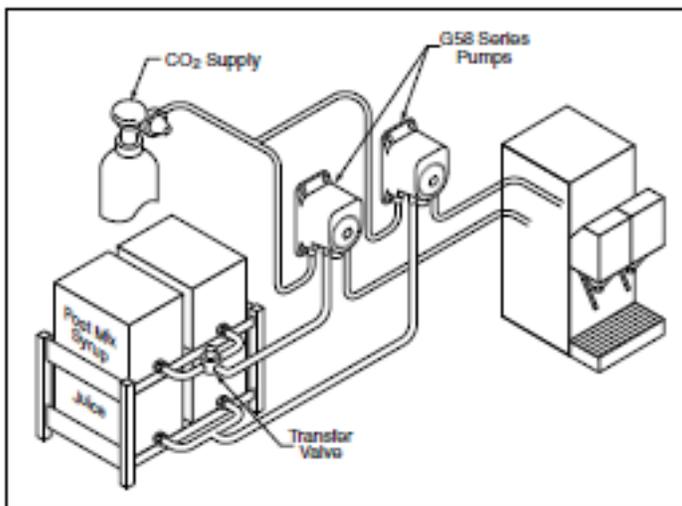

#### SPECIFICATIONS

Pump Design:	Positive Displacement, Double Diaphragm
Power Source:	CO2 Gas, Nitrogen or Compressed Dry Filtered Air
Materials of Construction (wetted parts):	Polypropylene, Santoprene®, EPDM, AISI 303 & 304 Stainless Steel
Temperature Limits:	34° - 120° F (1.1° - 49° C)
Weight:	1.24 lbs. (0.56 kg.)
Dimensions:	5.27" H x 3.21" W x 4.58" D (133.8 mm x 81.5 mm x 116.3 mm)
Displacement:	3.2 oz. per cycle
Self Priming:	Up to 6 ft. (1.83 m)
Operating Pressure:	20 psi (1.4 bar) min. / 90 psi (6.2 bar) max.
Liquid Inlet Pressure:	30 psi (2.1 bar) max.
Flow Rate:	6.0 oz. (177.4 ml) /sec. - Open Flow
Approvals:	CE, NSF Standard 18
Warranty:	5 Years

The above graphics and specifications were copied from the 2009 Flojet Product Catalog and is unedited. As a distributor for Flojet, we are providing the product details as provided by the manufacturer.