



Balance Control

Balance Control (V.A.) Carbonator



Features:

- Full cabinet provides quiet operation, protection of balance control mechanism, and sanitation confidence, while allowing easy access for greater serviceability
- Welded stainless steel tank for durability
- 1/3 hp motor and 100 GPH pump for enhanced performance
- Incorporates improved life single pole, single throw switches for simple fixed liquid differential. Liquid levels are factory set to ensure consistent operation and eliminate need for field adjustments
- Check valve protects against water entering CO₂ supply system
- Double ball check protects against carbonated water backing up into water supply
- Integral water strainer before pump is easily removable for cleaning
- Thermal protector on pump minimizes pump burn out due to lack of water
- Rubber feet provide stability and help ensure quiet operation
- Compact size facilitates usage in areas with limited space
- Flexibility for standard floor or optional wall mount



Balance Control Carbonator

Technical Specifications:

Carbonator Motor: 1/3 hp

Carbonator Pump: 100 GPH

Operating Pressure: 125 PSI maximum


Inlet Connections: 1/4" (.64 cm) male flare on CO₂ inlet, 3/8" male flare for water inlet, 1/4" (.64 cm) male flare on carbonated water outlet

Electrical Requirements:

115V / 6.8A, 220V / 50Hz, 230V / 60Hz

Shipping Weight: 30 lbs. (14 kgs.)

Agency Listings:

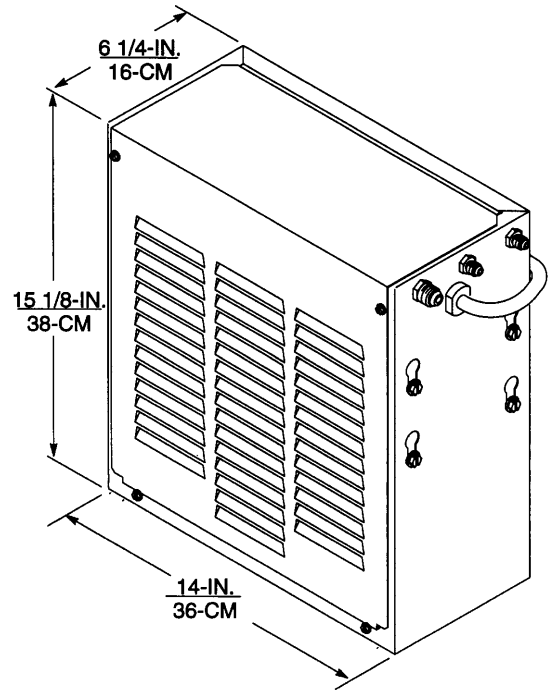

Part No.	Description
416411000	Complete Cornelius Carbonator, 115V / 6.8 amp
496411000	Complete Cornelius Carbonator, 220V / 50 Hz, 230V / 60 Hz
1621	Complete Cornelius Carbonator with vent-to-atmosphere check valve



For more information or to place an order, contact your sales representative or authorized distributor.

In the US:

Phone: 1-800-238-3600

Fax: 1-800-535-4235

Outside the US:

Phone: 1-763-421-6120

Fax: 1-763-422-3297

IMI Cornelius Inc.

One Cornelius Place
Anoka, MN 55303-6234
USA