





UC-40 SERIES

REMOTE COOLING UNITS

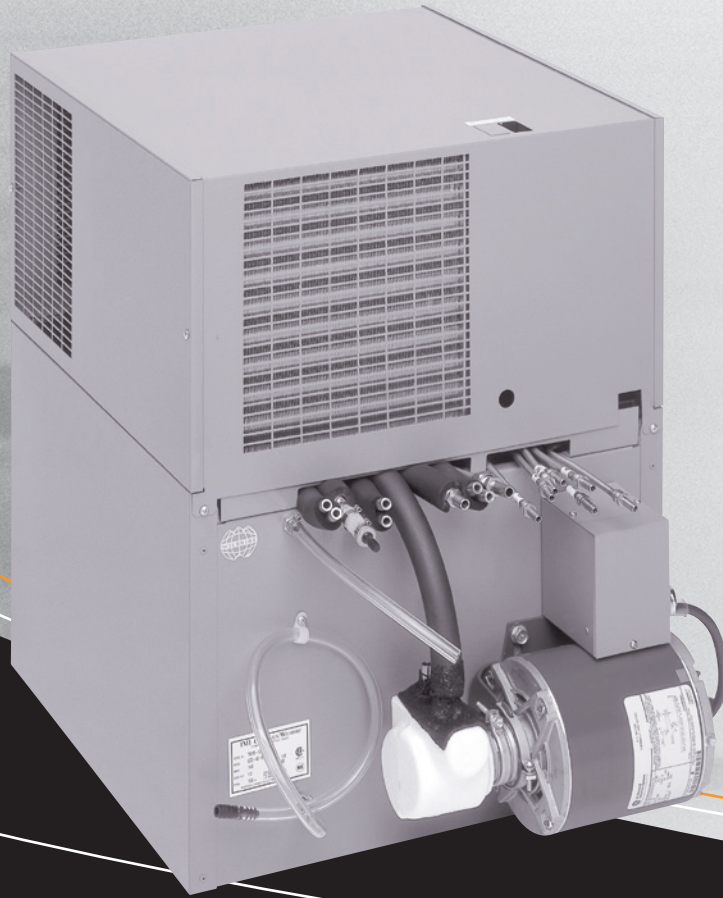

FEATURES:

- 6-Flavor capacity (UCR, UCCR), 40 lb (18.14 kg) ice bank, 1/3 HP recirculating motor
- Options: built-in carbonator, export voltages
- Durable construction, compact footprint, reliable, efficient, & cost effective
- Environmentally friendly foam insulation
- Environmentally safe R134a refrigerant

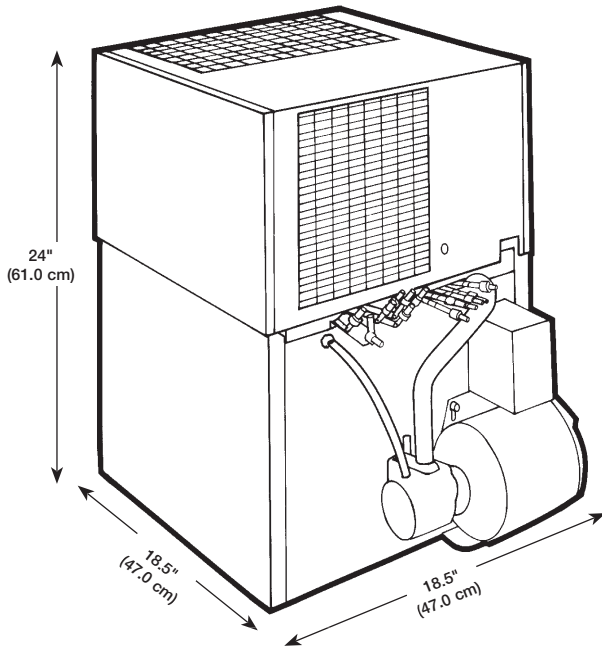

PART NUMBER	DESCRIPTION
100022SR	UCR-40 Remote
100049SG	UCCR-40 Remote
561600068	UCG-40 Remote, Glycol

TECHNICAL SPECIFICATIONS:

UC-40 AND UCC-40

DISPENSER:

VOLTS 115 VAC – 60 Hz

RUNNING AMPS 12 UC-40 / 14.6 UCC-40

AGITATOR MOTOR 15 W

CONDENSER FAN MOTOR 5 W

COMPRESSOR 1/2 HP – HFC-134a

ICE BANK CONTROL Mechanical Carbonator
UCC units only

MOTOR 1/3 HP

PUMP SIZE 100 GPH (380 LPH)
130 cu in

TANK SIZE 3.5" (89 mm) Dia x 12.0"
(305 mm) high immersed
in cold water bath

FITTINGS INLET WATER 3/8" (9.5 mm) barbed

FITTINGS INLET SYRUP 1/4" (6.4 mm) barbed

OPERATING WEIGHT UC-40 222 lb (100.6 kg)
UCC-40 241 lb (109.5 kg)

SHIPPING WEIGHT UC-40 127 lb (57.7 kg)
UCC-40 146 lb (66.4 kg)

AGENCY LISTINGS



UCG-40

COMPRESSOR 1/2 HP

GLYCOL TANK CAPACITY 11 gal (5 kg)

MOTOR 1/3 HP

PUMP 17 GPH

REFRIGERANT R134a

ELECTRICAL RATING 115 V / 60 Hz / 12 Amps

SHIPPING WEIGHT 135 lb (61 kg)

AGENCY LISTING

