




UC-40 SERIES

REMOTE COOLING UNITS

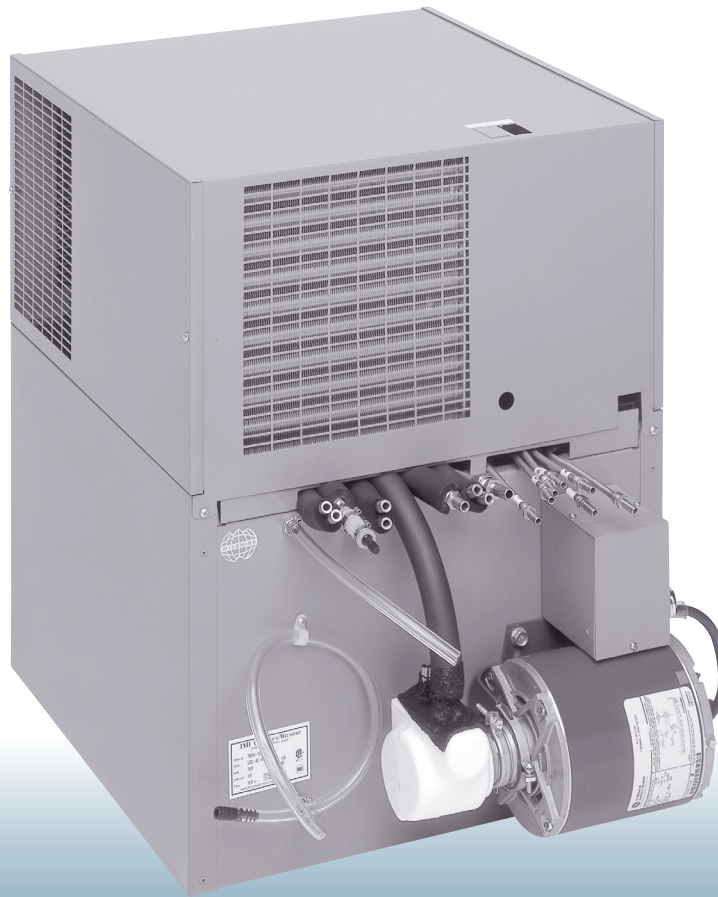

FEATURES


High capacity - 6-flavor capacity (UCR, UCCR), 40 lb (18.14 kg) ice bank, 1/3 HP recirculating motor

Options - Built-in carabonator, export voltages

Durable - Quality construction, reliable, efficient, and cost effective

Compact - Small footprint

Environmentally responsible - R134a refrigerant and foam insulation

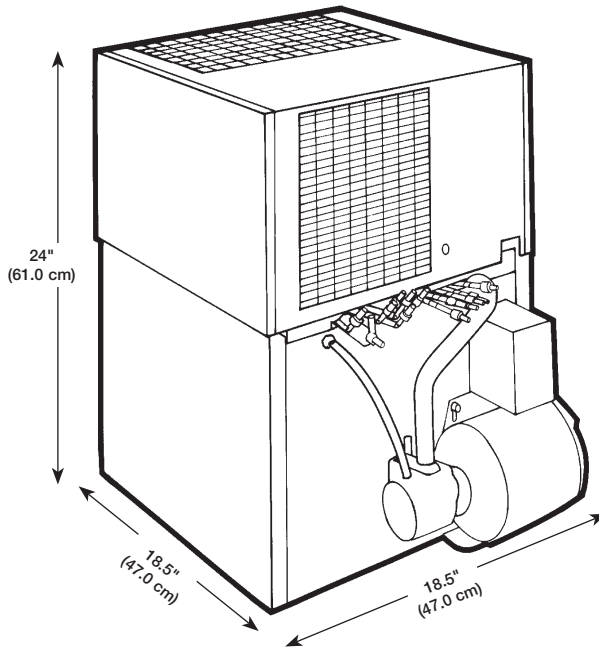

PART NUMBER	DESCRIPTION
100022SR	UCR-40 Remote
100049SG	UCCR-40 Remote

TECHNICAL SPECIFICATIONS

UC-40 AND UCC-40

DISPENSER:

VOLTS 115 VAC – 60 Hz
 RUNNING AMPS 12 UC-40 / 14.6 UCC-40
 AGITATOR MOTOR 15 W
 CONDENSER FAN MOTOR..... 5 W
 COMPRESSOR 1/2 HP – HFC-134a
 ICE BANK CONTROL Mechanical Carbonator
 UCC units only
 MOTOR 1/3 HP
 PUMP SIZE 100 GPH (380 LPH)
 130 cu in
 TANK SIZE 3.5" (89 mm) Dia x 12.0"
 (305 mm) high immersed
 in cold water bath

FITTINGS INLET WATER..... 3/8" (9.5 mm) barbed
 FITTINGS INLET SYRUP..... 1/4" (6.4 mm) barbed
 OPERATING WEIGHT UC-40 222 lb (100.6 kg)
 UCC-40 241 lb (109.5 kg)
 SHIPPING WEIGHT UC-40 127 lb (57.7 kg)
 UCC-40 146 lb (66.4 kg)

AGENCY LISTINGS

