

# SINGLE INLET BOTTLED WATER SYSTEM



Model Shown BW1000A

## FLOJET Single Inlet BW Series

At just 6" x 8" the Flojet Single Inlet Bottled Water Dispensing System is the most compact system you can buy and it's the most affordable.

- Float Switch for Automatic Shut-Off.
- Built-in Check Valve.
- Universal Seal Cap.
- Easy Mounting.
- Upgrade Kits are Available.




Appliance Controller Interface.  
Model shown BW1510A




**FLOJET**<sup>®</sup>

**TYPICAL INSTALLATIONS**


**Kitchen / Refrigerator  
with Single Inlet  
BW System**

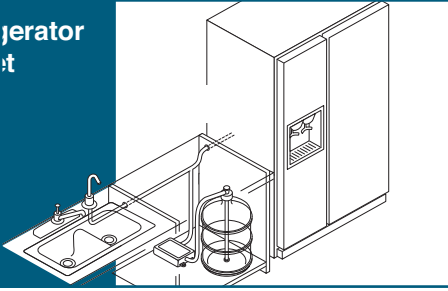

**Coffee Cart / Kiosk  
with Single Inlet  
BW system**



**Coffee Cart / Kiosk  
with Dual Inlet BW  
System and  
Appliance Controller**

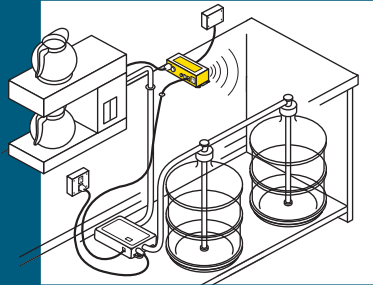

For more information on Flojet Appliance Controller, please reference form# F100-405 and form# F100-406 for the Dual Inlet system.

**KITS**

- Dual inlet suction kits (convert single inlet to dual inlet) PN# 21000633A
- Appliance Controller Interface kit (convert legacy models to A.C. Interface configuration) PN# 91006466A
- Single inlet suction hose replacement kit PN# 21000006B
- Appliance Controller PN# 91006467A
- Optional daisy chain (multi-hook up) 4-6 pin RJ-11 9' cable PN# 91006698A

**SPECIFICATIONS**

<b>Voltage</b>	115 VAC & 230 VAC, 12 VDC
<b>Cycles</b>	50/60 Hz. for AC Models
<b>Current</b>	
115 VAC	0.50 Amps. Max.
230 VAC	0.25 Amps. Max.
12 VDC	3.0 Amps. Max.
<b>Maximum Flow</b>	1.0 GPM (3.8 l/min.)
<b>Maximum Pressure</b>	40 PSI (2.8 bar)
<b>Housing Material</b>	ABS
<b>Shipping Weight</b>	6.4 Lbs. (2.9 kg)

**DIMENSIONS**

<b>Control Box</b>	3.0 in. H x 5.5 in. W x 7.5 in. D (76.0 mm x 140.0 mm x 190.0 mm)
--------------------	--

**MODEL NUMBERS**

<b>Single inlet</b>		
BW1000A	115 VAC	3.5 ft. (1 m) cord with plug
BW2000A	230 VAC	3.5 ft. (1 m) cord stripped
BW3000A	12 VDC	12 in. (30 cm) lead wires
<b>Dual Inlet</b>		
BW1020A	115 VAC	3.5 ft. (1 m) cord with plug
BW2020A	230 VAC	3.5 ft. (1 m) cord stripped
BW3020A	12 VDC	12 in. (30 cm) lead wires
<b>Dual Inlet with Appliance Controller Interface</b>		
BW1520A	115 VAC	3.5 ft. (1 m) cord with plug
BW2520A	230 VAC	3.5 ft. (1 m) cord stripped
BW3520A	12 VDC	12 in. (30 cm) lead wires

**SPECIAL FEATURES**

- Float switch for automatic shut-off
- Built-in check valve to prevent back flow
- Universal seal cap fits most water containers
- Easy Installation
- 20' (6.1m) 0.250" (0.5cm) OD discharge hose included



7790 Sears Blvd.  
Pensacola, FL 32514  
Fax 850-477-2458

**1-800-322-4853**