

1750 SERIES WATER PRESSURE REGULATORS



Flojet Water Pressure Regulators


- Minimizes inlet water fluctuation
- Limits inlet water pressure to levels safe for pumps and appliances
- Can be mounted in any position
- Available in 15, 30, 50, and 80 psi max. (nominal) models
- Manufactured with food-grade materials
- Removable, cleanable screen protects pumps and appliances from debris



Standard 18

FLOJET[®]

TYPICAL INSTALLATION

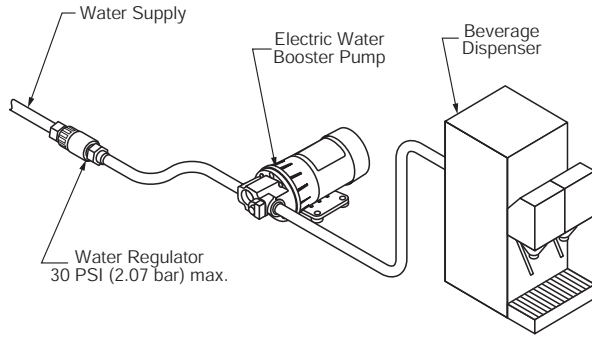

SPECIFICATIONS

Inlet Water Pressure	150 psi (10 bar) maximum
Fluid Temperatures	33°-150° F (1°-65° C)
Certification	NSF listed, Standard 18


SPECIAL FEATURES

- Minimizes inlet water fluctuation
- Limits inlet water pressure to levels safe for pumps and appliances
- Can be mounted in any position
- Available in 15 psi (1.0 bar), 30 psi (2.1 bar), 50 psi (3.4 bar) and 80 psi (5.5 bar) models
- Manufactured with food-grade materials
- Removable, cleanable screen protects pumps and appliances from debris
- Accepts 1/2" MNPT fittings
- Handles water temperature up to 150° (66° C)


STANDARD PART NUMBERS

1750-301	50 psi (3.4 bar) max, with 1/2" MNPT x 1/4" OD barbed fitting
1750-302	50 psi (3.4 bar) max, with 1/2" MNPT x 3/8" OD barbed fitting
1750-321	30 psi (2.1 bar) max, with 1/2" MNPT x 1/4" OD barbed fitting
1750-322	30 psi (2.1 bar) max, with 1/2" MNPT x 3/8" OD barbed fitting
1750-331	80 psi (5.5 bar) max, with 1/2" MNPT x 1/4" OD barbed fitting
1750-332	80 psi (5.5 bar) max, with 1/2" MNPT x 3/8" OD barbed fitting
1750-352	15 psi (1.0 bar) max, with 1/2" MNPT x 3/8" OD barbed fitting

DIMENSIONS inches (mm)

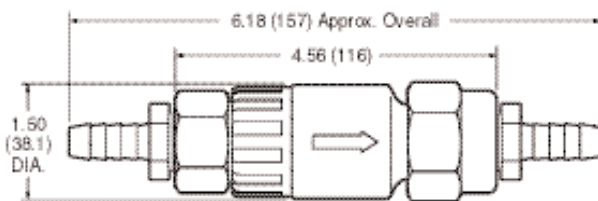

PERFORMANCE DATA, NOMINAL

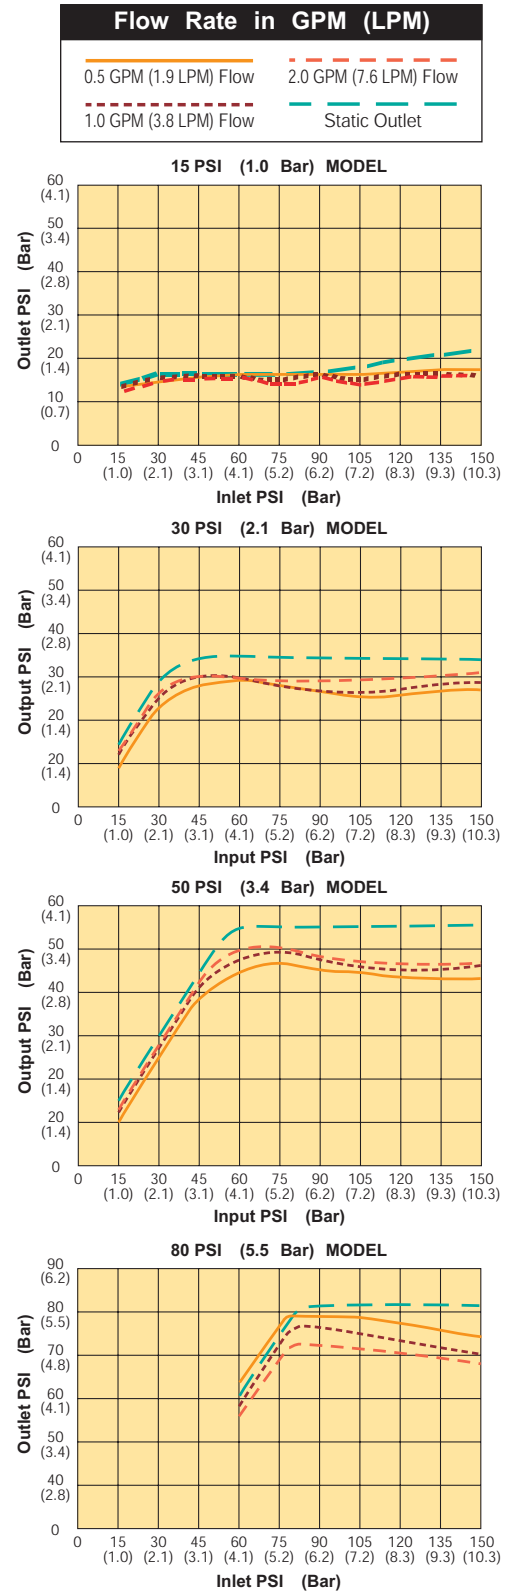

Flojet



For further information, contact your local FLOJET Representative, or write to:

USA
 Flojet
 20 Icon,
 Foothill Ranch, CA 92610
 Tel: 949 859 4945
 Fax: 949 859 1153

UK
 Flojet
 Bingley Road, Hoddesdon
 Hertfordshire EN11 0BU
 Tel: +44 (0) 1992 450145
 Fax: +44 (0) 1992 467132

www.flojet.com