



EV9337-22

# Dual High Flow Coldrink M-XC2

Delivers premium quality water for high volume, multiple fountain applications

Dual High Flow Coldrink M-XC2: EV9337-22  
 XC2 Replacement Cartridge: EV9613-10  
 EC210 Prefilter Cartridge: EV9534-26



## BENEFITS

High volume central system delivers premium quality water to meet demanding peak periods

New and improved Micro-Pure II media inhibits the growth of bacteria

Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages

Improves the taste of fountain beverages and helps retain the drink's carbonation

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces possible health contaminants such as cysts

Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination

## INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating

Never use saddle valve for connection

Use 3/4" water line

Install vertically with cartridges hanging down

Allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Flush cartridges by running water through system for five minutes at full flow

## OPERATION TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure falls below 10 psi

Service flow rate must not exceed 13,36 gpm

Always flush the filter cartridge at time of installation and cartridge change

## APPLICATION/SIZING

For fountain beverage applications

For multiple, simultaneous applications

Serves up to 8 machines at a time, including ice machines, coffee, etc.

Dual High Flow Coldrink M-XC2 Rated Capacity: 96,000 gallons

# Dual High Flow Coldrink M-XC2

## SPECIFICATIONS

Overall Dimensions:  
36"H x 37.5"W x 13.5"D

Inlet connection:  
3/4" MNPT

Outlet connection:  
3/4" FNPT

Service Flow Rate:  
Maximum 13.36 gpm (50.57 Lpm)

Rated Capacity (S-MC2):  
72,000 gallons


Pressure Requirements:  
10 - 125 psi (0.7 – 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)  
No electrical connection required

Shipping Weight: 82 lbs.

Operating Weight: 85 lbs.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

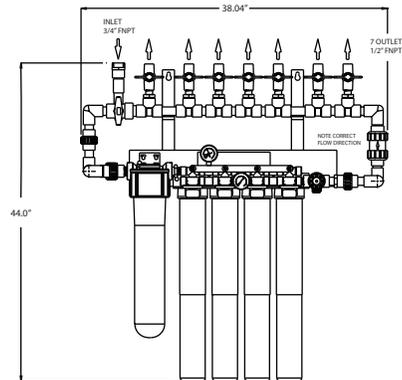

## WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

### EVERPURE®

Worldwide Headquarters:  
EVERPURE, LLC  
1040 Muirfield Drive  
Hanover Park, Illinois 60133  
Toll Free (800) 323-7873  
Tel (630) 307-3000  
Fax (630) 307-3030  
<http://www.everpure.com>

In Europe:  
Pentair Water Belgium B.V./B.A.  
Industriepark Wolfstee  
Toekomstlaan 30  
B-2200 Herentals  
BELGIUM  
TEL: +32.(0).14.283.500  
FAX: +32.(0).14.283.505

In Japan:  
Hashimoto MN Bldg. 7F  
3-25-1 Hashimoto Sagamihara-Shi  
Kanagawa 229-1103  
JAPAN  
TEL: 81.(0)42.775.3011  
FAX: 81.(0)42.775.3015