



VIPER (E) 2 FLAVOR, VIPER (E) 3 FLAVOR & VIPER (E) 4 FLAVOR

Installation Manual



Release Date: October 28, 2008

Publication Number: 621260373INS

Revision Date: July 26, 2019

Revision: L

Visit the Cornelius web site at www.cornelius.com for all your Literature needs.

The products, technical information, and instructions contained in this manual are subject to change without notice. These instructions are not intended to cover all details or variations of the equipment, nor to provide for every possible contingency in the installation, operation or maintenance of this equipment. This manual assumes that the person(s) working on the equipment have been trained and are skilled in working with electrical, plumbing, pneumatic, and mechanical equipment. It is assumed that appropriate safety precautions are taken and that all local safety and construction requirements are being met, in addition to the information contained in this manual.

This Product is warranted only as provided in Cornelius' Commercial Warranty applicable to this Product and is subject to all of the restrictions and limitations contained in the Commercial Warranty.

Cornelius will not be responsible for any repair, replacement or other service required by or loss or damage resulting from any of the following occurrences, including but not limited to, (1) other than normal and proper use and normal service conditions with respect to the Product, (2) improper voltage, (3) inadequate wiring, (4) abuse, (5) accident, (6) alteration, (7) misuse, (8) neglect, (9) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (10) improper cleaning, (11) failure to follow installation, operating, cleaning or maintenance instructions, (12) use of "non-authorized" parts (i.e., parts that are not 100% compatible with the Product) which use voids the entire warranty, (13) Product parts in contact with water or the product dispensed which are adversely impacted by changes in liquid scale or chemical composition.

Contact Information:

To inquire about current revisions of this and other documentation or for assistance with any Cornelius product contact:

www.cornelius.com
800-238-3600

Trademarks and Copyrights:

This document contains proprietary information and it may not be reproduced in any way without permission from Cornelius.

This document contains the original instructions for the unit described.

CORNELIUS INC
101 Regency Drive
Glendale Heights, IL
Tel: + 1 800-238-3600

Printed in U.S.A.



RECYCLE

Correct Disposal of this Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

TABLE OF CONTENTS

Safety Instructions	1
Read and Follow ALL Safety Instructions	1
Safety Overview	1
Recognition	1
Different Types of Alerts	1
Safety Tips	1
Qualified Service Personnel	2
Safety Precautions	2
Shipping And Storage	2
Mounting in or on a Counter	2
Viper Machine Usage	3
Decommissioning and/or Transporting the Unit	3
Storage within the Machine	3
Noise Level	3
Introduction	4
System Overview	4
Introduction	4
Dispensed Product Conditions	4
Overrun, as Applied to Carbonated Beverages	4
Installation	6
Delivery, Inspection & Unpacking	6
Counter Location	6
Installing Leg	6
Counter Mounting	7
Countertop Template Installation Instructions	7
Backroom Requirements	8
Supply Connections	8
Electrical Requirements	9
Water Supply Requirements	10
CO ₂ Requirements	11
Installing The Drip Tray	13
Installing The Graphics Sheet	14
Installing The Flavor Card	14
Cart Information and Mounting	14
Servicing Motorman Dispensing Valves	15
Suggested Sanitizers	15
Servicing SPH Dispensing Valves	17
Sanitizing the System	17
Suggested Sanitizers	17
Control Panel Overview	21
Setting Up the Control Panel	21
Setting the System Options	22
Commissioning the Unit	29
Unit Location	29
Pressurizing the Water System	29
Pressurizing the CO ₂ System	30

Pressurizing the Syrup System	31
Setting BRIX	31
Filling the Barrels	34
Calibrating a Motor	34
Security Menu	36
Troubleshooting	37
Specifications	38


SAFETY INSTRUCTIONS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

Safety Overview

- Read and follow **ALL SAFETY INSTRUCTIONS** in this manual and any warning/caution labels on the unit (decals, labels or laminated cards).
- Read and understand **ALL** applicable OSHA (Occupational Safety and Health Administration) safety regulations before operating this unit.

Recognition

	<i>Recognize Safety Alerts</i>
	<i>This is the safety alert symbol. When you see it in this manual or on the unit, be alert to the potential of personal injury or damage to the unit.</i>

DIFFERENT TYPES OF ALERTS

DANGER:

Indicates an immediate hazardous situation which if not avoided **WILL** result in serious injury, death or equipment damage.

WARNING:

Indicates a potentially hazardous situation which, if not avoided, **COULD** result in serious injury, death, or equipment damage.

CAUTION:

Indicates a potentially hazardous situation which, if not avoided, **MAY** result in minor or moderate injury or equipment damage.

SAFETY TIPS

- Carefully read and follow all safety messages in this manual and safety signs on the unit.
- Keep safety signs in good condition and replace missing or damaged items.
- Learn how to operate the unit and how to use the controls properly.
- **Do not** let anyone operate the unit without proper training. This appliance is **not** intended for use by very young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.
- Keep your unit in proper working condition and do not allow unauthorized modifications to the unit.

NOTE: The dispenser is not designed for a wash-down environment and **MUST NOT** be placed in an area where a water jet could be used.

QUALIFIED SERVICE PERSONNEL

WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit. **ALL WIRING AND PLUMBING MUST CONFORM TO NATIONAL AND LOCAL CODES. FAILURE TO COMPLY COULD RESULT IN SERIOUS INJURY, DEATH OR EQUIPMENT DAMAGE.**

IF THE SUPPLY CORD IS DAMAGED, IT MUST BE REPLACED BY THE MANUFACTURER, ITS SERVICE AGENT OR SIMILARLY QUALIFIED PERSONS IN ORDER TO AVOID A HAZARD.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

WARNING:

Disconnect power to the unit before servicing following all lock out/tag out procedures established by the user. Verify all of the power is off to the unit before any work is performed.

FAILURE TO DISCONNECT THE POWER COULD RESULT IN SERIOUS INJURY, DEATH OR EQUIPMENT DAMAGE.

CAUTION:

Always be sure to keep area around the unit clean and free of clutter. **FAILURE TO KEEP THIS AREA CLEAN MAY RESULT IN INJURY OR EQUIPMENT DAMAGE.**

SHIPPING AND STORAGE

WARNING:

Do not use dispense spigot to lift or move unit as this could result in personal injury.

CAUTION:

Before shipping, storing, or relocating the unit, the unit must be sanitized and all sanitizing solution must be drained from the system. A freezing ambient environment will cause residual sanitizing solution or water remaining inside the unit to freeze resulting in damage to internal components.

MOUNTING IN OR ON A COUNTER

WARNING:

When installing the unit in or on a counter top, the counter must be able to support a weight in excess of 450 lbs. to insure adequate support for the unit.

Failure To Comply Could Result In Serious Injury, Death Or Equipment Damage.

NOTE: Many units incorporate the use of additional equipment such as ice makers. When any addition equipment is used you must check with the equipment manufacturer to determine the additional weight the counter will need to support to ensure a safe installation.

VIPER MACHINE USAGE

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

This appliance is not intended to be used in household and similar applications such as:

- staff kitchen areas in shops, offices and other working environments
- farm houses and by clients in hotels, motels and other residential type environments
- bed and breakfast type environments
- catering and similar non-retail applications

THE APPLIANCE HAS TO BE PLACED IN A HORIZONTAL POSITION

DECOMMISSIONING AND/OR TRANSPORTING THE UNIT

Whenever the viper unit is going to be removed from service and/or transported, the unit must be completely drained of product and rinsed out to remove residual product.

When transporting the unit, make sure that the product bowl is removed from the top of the unit and stored in a safe place for shipment. The unit must be carefully tied down or stored in such a manner that the unit will not move during shipment.

STORAGE WITHIN THE MACHINE



CAUTION:

Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

NOISE LEVEL

This unit emits acoustical noise with an A-weighted sound pressure level no greater than 75dB, as measured in accordance with ED 60335-2-75.

INTRODUCTION

SYSTEM OVERVIEW

Introduction

The Viper system is a state-of-the-art FCB/FUB machine. Viper provides improved drink availability, reliability and reduced complexity in a compact, reduced footprint machine.

Viper provides the highest quality in drink appearance and consistency while keeping operation and maintenance simple and straightforward.

The unit consists of multiple freeze barrels that each contain an internal beater driven by an electric motor, a refrigeration system, a timer-controlled, intelligent defrost system and interconnecting tubing and controls required to dispense the product.

DISPENSED PRODUCT CONDITIONS

Overrun, as Applied to Carbonated Beverages

Overrun Definition

Overrun is defined as product expansion that takes place in the frozen carbonated drink. It is caused primarily by CO₂ gas breakout and secondarily by freezing.

Overrun is a Variable

The percentage or degree of overrun depends on a number of factors. The specific syrup, BRIX, low dispensing volume, carbonation level in the liquid product and freezing of the product. These items all affect overrun. After these factors have been considered, desired viscosity (product consistency) adjustment may be made on the unit. The viscosity adjustment adjusts product texture from very wet to light.

Specific Product Ingredients Affect Overrun

Each syrup has its own specific formulation of makeup. Fruit flavors contain citric acids that colas do not. Colas also differ in ingredients from one brand to another. Each product formulation has its own peculiarities regarding the way the product absorbs carbonation and the way it releases carbonation.

BRIX Affects Overrun

Sugar in carbonated drinks is like anti-freeze in water. The higher the BRIX, the greater the resistance of the product to freezing. Conversely, in products with lower BRIX, freezing takes place at higher temperatures than for high-BRIX products. Thus, BRIX affects overrun because the amount of sugar in a drink has a direct bearing on the product's freezing characteristics.



Figure 1.

Low Dispensing Volume Affects Overrun

When a unit sits idle for a period of time with no drinks being dispensed, CO₂ gas in the system takes a “set”. When the first few drinks are drawn off after an idle period, CO₂ gas has less tendency to break out as the drink is dispensed. The result is that these first drinks have less overrun than drinks dispensed during peak-use periods.

Carbonation Level in Liquid Product Affects Overrun

The higher the specific carbonation level in a given product, the greater the potential for carbonation breakout in frozen carbonated form of that drink. For example, drinks with 3.0 volume of carbonation have more gas breakout in frozen carbonated form and more overrun than drinks that contain 2.0 volumes of CO₂ gas.

Freezing Affects Overrun

Freezing causes approximately a 5-7 percent expansion in dispensed frozen carbonated drinks. The degree of freezing is limited because the finished drink is intended to be sipped through a straw. This is not possible if the product is too “solid”.

INSTALLATION

DELIVERY, INSPECTION & UNPACKING

NOTE: Cornelius is not responsible for damaged freight. If damage is found, you must save all packaging material and contact the freight carrier. Failure to contact the carrier within 48 hours of receipt may void your claim.

1. Inspect the carton and note any damage, regardless if it appears minor. If the carton is damaged, note on the consignee copy of the freight invoice "exterior carton damage – concealed damage possible" and contact the freight company immediately.
2. Remove any staples along the bottom edge of the carton and lift the carton off the pallet.
3. Remove the exterior carton sleeve, internal fillers and plastic bag around the unit. Carefully inspect the unit for damage.
4. Remove the bolts holding the dispenser to the pallet.
5. Remove the packing fillers from the top of the unit.
6. Inspect the dispenser cabinet and make sure it has no scratches, dents or any other cosmetic defects.
7. Make sure that the glass or plastic merchandiser panels are not scratched or cracked.
8. Open the packages of loose parts and inspect all of the parts for damage or missing parts. Check the parts received against the packing list to insure receipt of all parts.

NOTE: If unit is installed more than three months from date of production, replace the seals according to the instructions accompanying the spare seals supplied with the unit. Unite date of manufacture is included in the unit serial no. as follows: The date code follows the first letter of the serial number. The next four numbers reflect the date of manufacture. The first two represent the year, the next two the week. For example, 62A0815xxxxxx would be a unit produced during the 15th week of 2008.

COUNTER LOCATION

Select a location in a well ventilated area, close to a grounded electrical outlet and backroom connections. The counter must be capable of supporting a minimum of 400 pounds. If possible do not place the unit close to hot and/or steaming machines.

The minimum clearance is: 2 in. (5.08 cm) in back and 12 in. (30.48 cm) on top of the unit. If both sides have a minimum clearance of 2" (5.08 cm), then the unit may be flush to the wall in the back.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the unit.

NOTE: Condenser air is drawn in from the sides or back and discharged out the top. Failure to maintain clearance space will reduce the capacity of the unit and cause premature compressor failure.

INSTALLING LEG

NOTE: Before installing legs, the plastic plugs must be removed.

Unpack the four (4) legs and install them into the threaded holes provided in the bottom of the unit. The installer must provide flexibility in the product and utility supply lines to permit shifting the position of the dispenser sufficiently to clean the area beneath it.

COUNTER MOUNTING

The Viper unit must be sealed to the counter. The MOUNTING TEMPLATE (Figure 2.) indicates where openings can be cut in the counter. Locate the desired position for the dispenser, then mark the outline dimensions on the counter using the MOUNTING TEMPLATE. Cut openings in the counter.

Apply a continuous bead of National Sanitation Foundation (NSF) listed silastic sealant (Dow 732 or equal) approximately 1/4" inside of the unit outline dimensions and around all openings. Then, position the unit on the counter within the outline dimensions. All excess sealant must be wiped away immediately.

The beverage tubes, drain tube and power cord are routed through the large opening in the bottom of the unit. See the MOUNTING TEMPLATE (see Figure 2.), for locating the required clearance hole in the counter for these utility lines.

COUNTERTOP TEMPLATE INSTALLATION INSTRUCTIONS

Use the template shown in Figure 2. and the dimensions shown in Table 1. to drill the necessary holes for installing the unit.

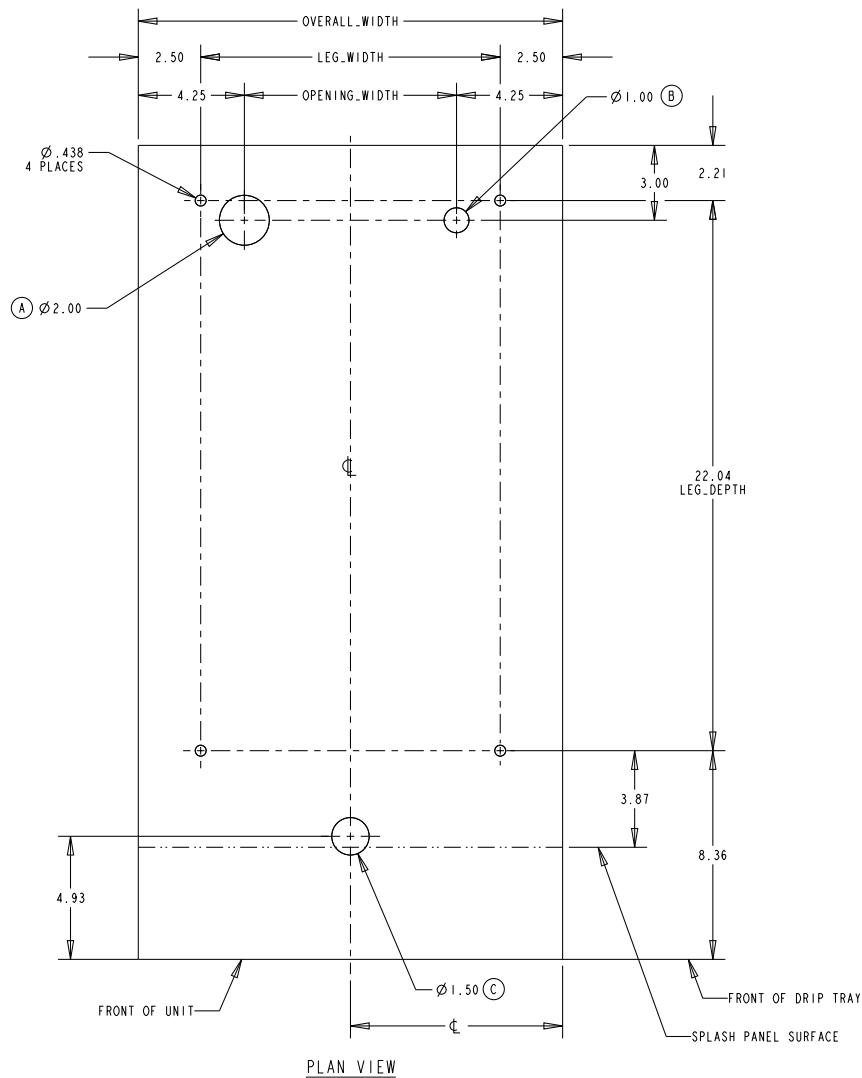


Figure 2.

- A - Opening for Product Tubes
- B - Opening for Electrical Cables
- C - Opening for Drip Tray Drain

Table 1.

Model	Overall Width (In.)	Leg Width (In.)	Opening Width (In.)	Center Line (In.)
2FL	17.00	12.00	10.25	8.50
3FL	22.90	17.90	14.40	11.45
4FL	29.00	24.00	22.25	14.50

BACKROOM REQUIREMENTS

Typically the supplies for the unit are located in a backroom adjoining the service area. Syrup, water and CO₂ lines are then run from the backroom to the service area. The backroom supplies (syrup boxes, CO₂, water filters and pumps) are typically installed on a rack system that sits on the floor, as shown in Figure 3. The CO₂ cylinder is normally mounted against the wall.



Figure 3.

SUPPLY CONNECTIONS

All of the electrical and supply connections to the unit are typically located near the bottom rear of the unit. There are alternate locations for the electrical and supply connections on the bottom of the unit, below the rear locations. The bottom connection locations may be used if the unit is located directly against a wall.

The electrical connection is located at the left side of the rear panel and the tubing supplies are located on the right side, as shown in Figure 4.

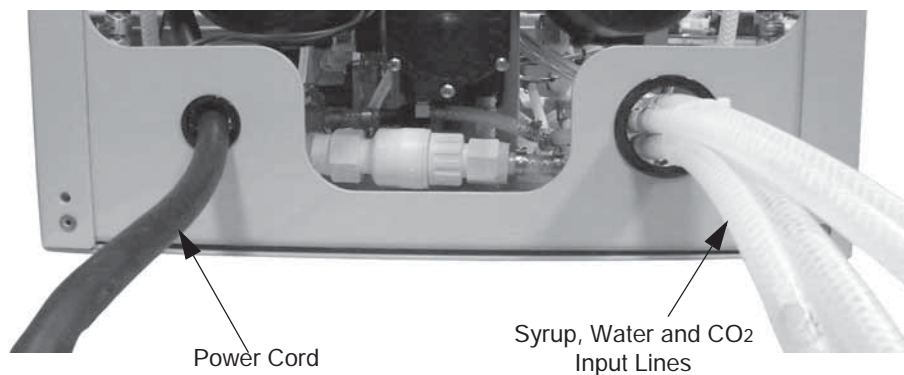


Figure 4.

Electrical Requirements

Refer to the nameplate to determine the power requirements before connecting electrical power to the unit. All of the power cords shall comply with safety requirements outlined in the EC Standards (EN60335-1 1 Clause 24.1) in countries where CE compliance is required. All cords must be HD 21 or HD 22.

Line Voltage

The recommended line voltage range for the Viper unit is 215 to 245VAC. Measure the voltage at the wall outlet to verify proper wiring of the outlet before plugging the Viper unit in.

Power

The power circuit must have some sort of overload protection, such as a circuit breaker or fuse that meets local and national electrical codes. Table 2. shows the power requirements for the various types of units.

Table 2.

2-Barrel 60Hz	3-Barrel 60Hz	4-Barrel 60Hz	2-Barrel 50Hz	3-Barrel 50Hz
20 A. Circuit	30 A. Circuit	30 A. Circuit	20 A. Circuit	30 A. Circuit

Electrical Connections

50Hz and 60Hz units are supplied with the power cord attached. Skip installation information in Table 3. and begin with the Water Supply Requirements section.

(For reference only, to service the power cord for AC power input, perform the procedure as mentioned in Table 3.)

Table 3.

Step	Action
1	Ensure that power to the unit is off. DO NOT plug the power cord into the wall outlet at this time.
2	50 Hz unit remove the right side and rear panel from the unit. 60 Hz unit open the merchandiser door to access main electrical box.
3	Remove the cover from the electrical box.
4	Feed the power cord through the strain relief, as shown in Figure 5. for 60 Hz and see Figure 6. for 50Hz.
5	Pull the slack out of cable and tighten the strain relief (see Figure 5. for 60 Hz and see Figure 6. for 50 Hz)
6	Connect the colored wire to the appropriate terminal on the terminal block.
7	Connect the black wire to the appropriate terminal on the terminal block.
8	Connect the green wire to the ground terminal next to the terminal block.
9	Replace the power box cover. DO NOT TURN ON THE POWER at this time.

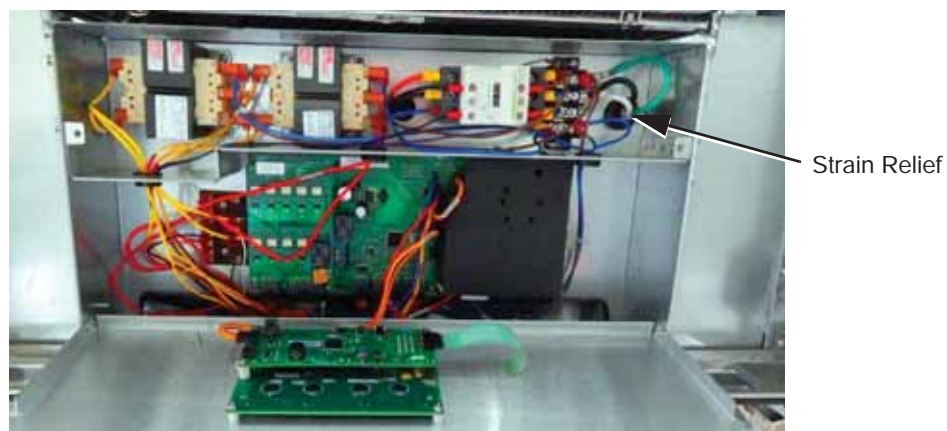


Figure 5. (60 Hz unit)

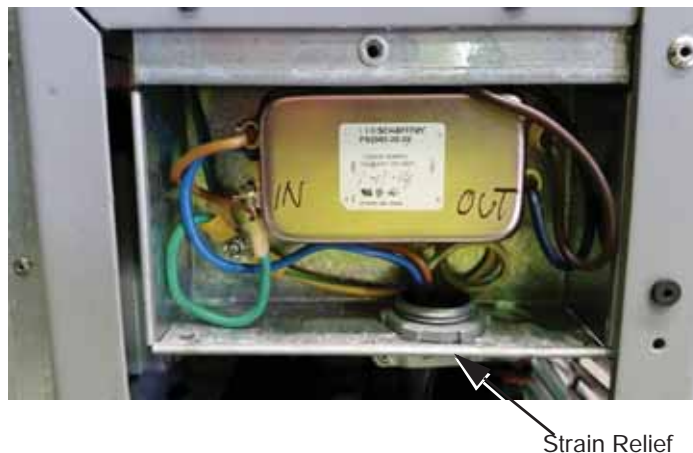


Figure 6. (50Hz unit)

Water Supply Requirements

NOTE: Water connections require 1/2" I.D. tubing. All hoses must reach the back of the unit plus an adequate amount of extra tubing to allow the unit to be pulled out for servicing.

The Viper unit is designed as a high throughput unit. It is very important that the incoming water line is dedicated to the unit. This line should not have any other machines connected which could cause a water surge, such as coffee makers or ice machines.

IMPORTANT:

The water supply should be consistent with proper water quality standards (neutral pH of 7.0 to 8.0), and should not be connected to a water softener. Drink quality may be affected by poor water conditions. Water connections should be sized, installed and maintained according to federal, state and local laws.

NOTE: Size, install, and maintain the water pipe, connections, and fixtures directly connected to a potable water supply in accordance with Federal, State, and Local codes. It is the installer's responsibility to ensure that the potable water supply is equipped with protection against backflow. This protection can be an air gap as defined by ANSI/ASME A112.1.2-1979 or by an approved vacuum breaker or other approved method. If the flowing water pressure at the back of the unit is less than the specified 25 psi and 100 GPH flowrate (per 2 barrels) a water pressure booster is required. It is recommended that a water shutoff valve and water filter be installed in the water supply line.

Water Connections

Use the appropriate fittings and clamps to connect the water line to the unit. Run the tubing for the water (1/2 in. ID, Min.) from the water source in the backroom to the unit and make all appropriate connections. **Do not** turn on the water supply to the unit.

CO₂ Requirements



WARNING:

CO₂ displaces oxygen. Persons exposed to high concentrations of CO₂ will experience tremors, followed by loss of consciousness and **death**. It is very important to prevent CO₂ leaks, especially in small unventilated areas. If a CO₂ leak occurs ventilate the area before fixing the leak.

NOTE: There are two CO₂ delivery systems available: High Pressure Cylinder; Low Pressure Bulk System.

High pressure Cylinder requires a primary regulator with a minimum inlet pressure of 500 psi.

Low Pressure Bulk System requires a secondary regulator with a maximum inlet pressure of 200 psi.

NOTE: CO₂ connections require 3/8" I.D. tubing. All hoses must reach the back of the unit plus an adequate amount of extra tubing to allow the unit to be pulled out for servicing.

NOTE: Use a dedicated secondary regulator adjusted to 75 ±1 psig to supply the unit.

CO₂ Connections

Use a source-dedicated secondary regulator, fittings and clamps to connect the CO₂ line to the unit, as shown in Figure 7. Set the regulator for 75 ±1 psig at the unit. Run the tubing for the CO₂ from the secondary regulator to the unit and make all appropriate connections. Ideally, locate the regulator within **3 ft.** of the unit. Another secondary regulator is to be used to supply the Bag in Box pumps. It is to be set to 75 psig, not lower. Do not turn on the CO₂ supply to the unit.

Syrup Requirements

NOTE: Syrup connections require 3/8" I.D. tubing. All hoses must reach the back of the unit plus an adequate amount of extra tubing to allow the unit to be pulled out for servicing.

Syrup Connections

Use the appropriate fittings and clamps to connect the syrup line to the unit. Run the tubing for the syrup (3/8 in. ID, Min.) from the backroom to the unit and make all appropriate connections. **Do not** turn on the syrup supply to the unit.

Testing Power

The following procedure provides a minimal operational test of the power to the unit. Perform the procedure in Table 4.

Table 4.

Step	Action
1	Verify the voltage being supplied to the unit. It should be between 215 and 245 Volts, measured at the wall outlet.
2	Plug in the unit power cord and turn on power to the unit.
3	The barrels are off when the unit is initially powered up and the unit displays the "Water Out" message.
4	Unit powers up with Do Not Drink and Out of Product lights on.
5	If the unit displays normal startup operation, proceed to "Setting Up the Control Panel" on page 21.

INSTALLING THE DRIP TRAY

Slide the drip tray into the two brackets protruding from the bottom of the unit until the tray contacts the two detents in the brackets. then place the cup rest on the drip tray. See Figure 8.

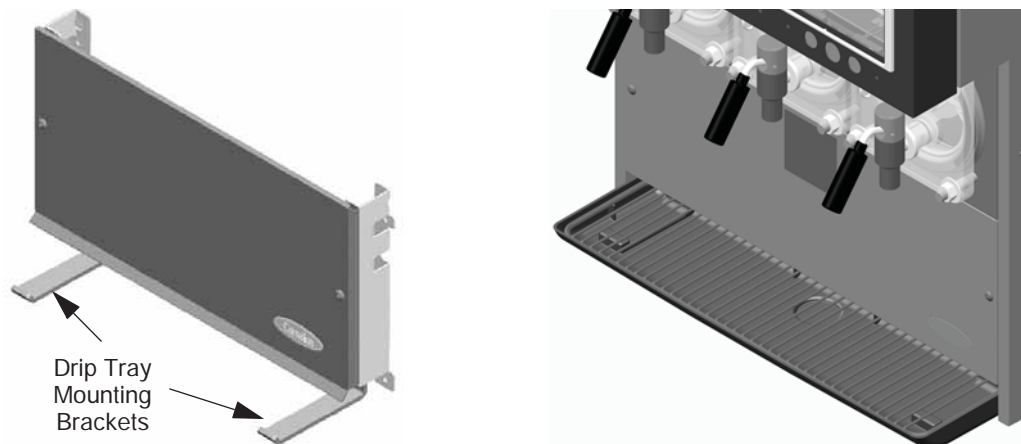


Figure 8.

INSTALLING THE GRAPHICS SHEET

See Figure 9. for installing the merchandiser graphics.

Remove the screw from the top of the merchandiser door, flip the top cover backward and insert the graphic sheet. The graphic sheet should be inserted between the diffuser and the clear plastic graphic lens. Once the graphics are in place, flip the top cover back to the original position, replace and tighten the screw.



Figure 9.

INSTALLING THE FLAVOR CARD

See Figure 10. for installing the flavor card.

Insert the flavor card in to the flavor card window as shown.



Figure 10.

CART INFORMATION AND MOUNTING

The Viper unit may be mounted on a mobile cart (Cornelius part no. 620043075 for 2-barrel unit, 620053990 for 3-barrel unit and 620046556 for 4-barrel unit) which allows some movement of the unit for service and cleaning. There are four captive nuts on the bottom of the Viper to accommodate four 3/8-16 bolts. These bolts must be installed to secure the unit to the cart.

These carts are also designed with movable wheels that act as outriggers to provide stability to the unit when it is being moved.

! WARNING:

The above listed mounting bolts must be installed and the wheels extended and locked in the outboard position prior to moving the unit.

Failure to comply could result in serious injury, death or equipment damage.

This completes the initial installation of the unit. The following sections describe the control panel operation and commissioning the unit.

Servicing Motorman Dispensing Valves

NOTE: Dispensing valves with caged o-rings should be serviced (lubricated) every 6 months or more frequently if the valve lever gets tight to operate. Caged O-rings should be replaced every 12 months.

Refer to and perform the procedure in Table 5 to lubricate or change the caged o-rings in each dispensing valve on the unit.

Suggested Sanitizers

KAY-5® Sanitizer/Cleaner (100 PPM)

Mix one packet of KAY-5® Sanitizer/Cleaner per 2.5 gallons of tap water [70°-100°F (24°-35°C)] according to manufacturer's instructions to ensure 100 PPM of available chlorine.

Household Bleach (200 PPM)

For 6% Sodium Hypochlorite bleach, mix 2.5 fl oz (75mL) in 5 gallons of tap water [70°-100°F (24°-35°C)]. For 5.25% Sodium Hypochlorite bleach, mix 2.2 fl oz (66mL) of bleach in 5 gallons of tap water [75°-95°F (24°-35°C)]. This will ensure a bleach solution of 200 PPM of available chlorine.

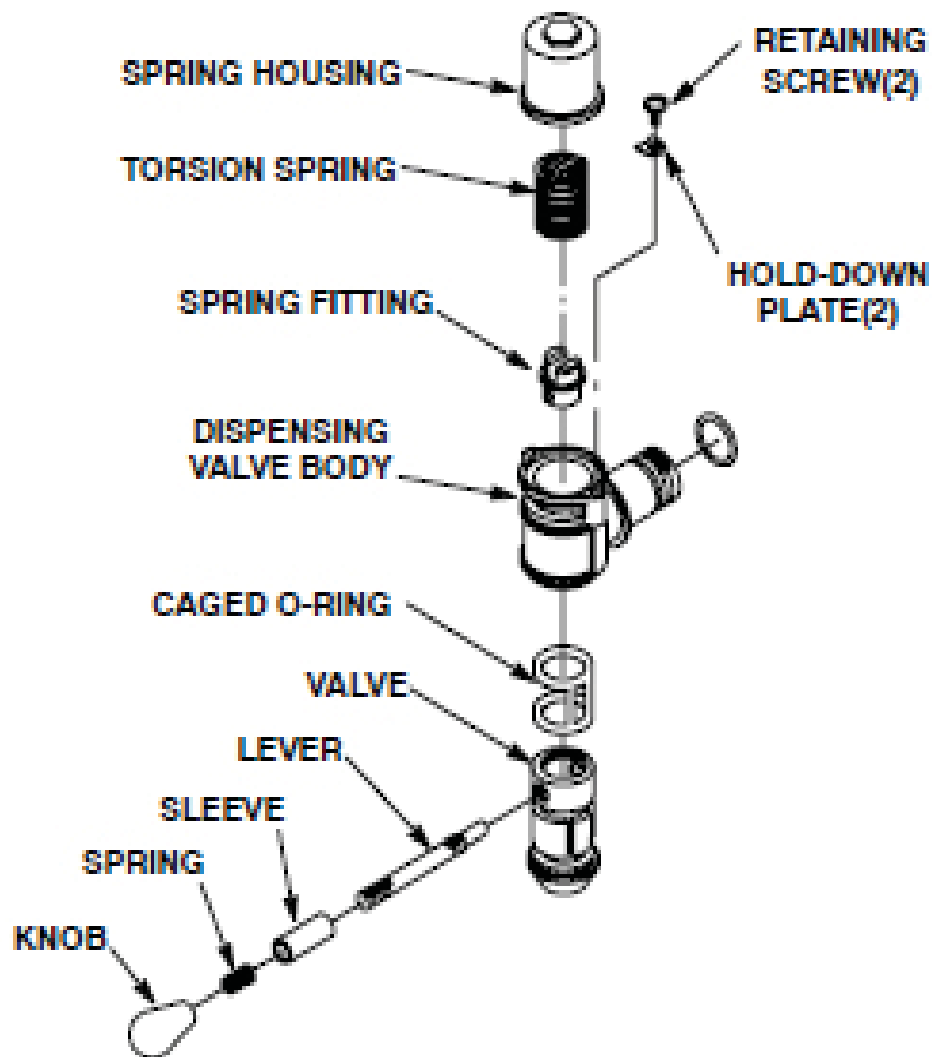


Figure 11. Self-Closing Dispensing Valve

Table 5.

Step	Action
1.	Defrost freeze cylinders, shut unit down, disconnect electrical power from Unit.
2.	Perform the procedure in Table 7 to empty the barrels.
3.	Remove the hex nuts and flat washers securing the faceplate to the freeze barrel, then remove the faceplate from the barrel.
4.	Carefully remove the large o-ring from the faceplate.
5.	Unscrew the relief valve from the faceplate.
6.	Disassemble the dispensing valve (Figure 11.).
7.	Remove ice ball grate from faceplate, if applicable
8.	Remove the two screws and hold-down plates securing the spring housing to the dispensing valve body, then remove the housing.
9.	Remove the torsion spring from the dispensing valve.
10.	Remove the knob, spring, sleeve, and lever from the dispensing valve.
11.	Remove spring fitting from dispensing valve.
12.	Press the valve with the caged O-ring, down and out of the dispensing valve body.
13.	Carefully remove the caged O-ring from the valve.
14.	Wash all the parts in warm water. Remove all traces of syrup and lubricant, especially from the faceplate, o-rings, ice ball grate (if applicable), and dispensing valve. If parts are excessively coated, wipe clean with a paper towel to remove excess syrup and lubricant, especially from caged o-ring and dispensing valve. Use a brush (provided with the unit) to clean the faceplate relief valve passages.
15.	Submerge all the parts in a sanitizing solution according to the suggested sanitizers above for 10 minutes (no more than 15 min).
16.	Remove the parts from the sanitizing solution and place them on clean paper towels.
17.	Assemble the dispensing valve. Rinse them with warm water, and place them on clean paper towels.
18.	Lubricate the caged o-ring. Carefully install the caged o-ring onto the valve from the straight end (opposite tapered end). Lubricate the grooves that the o-ring rides to fill in all void areas around the o-ring.
19.	Carefully install the valve with the caged o-ring in the dispensing valve body.
20.	Install the spring fitting, knob and lever parts, torsion spring and spring housing assembly by reversing the removal procedure. Do not tighten down the hold-down plates securing the spring housing at this time.
21.	After re-installing the faceplate, turn the dispensing valve spring housing to the left (counterclockwise) to put tension on the tension spring. Apply just enough tension so that the dispense valve shaft returns to the closed position after release. Do not over-tighten. Overtightening results in a high activation force on the valve.

NOTE: Use Dow-Corning DC-111 (P/N 321471000) light grade silicone lubricant to lubricate the O-rings.

Servicing SPH Dispensing Valves

Sanitizing the System

The syrup systems should be sanitized every 180 days by a qualified service technician following the sanitizer manufacturer's recommendations or when changing syrup types.

The sanitizing process consists of emptying the barrel Table 7, washing the lines and barrel, cleaning the BIB connectors, rinsing and refilling the system.

NOTE: Sanitizing should only be performed by qualified service technicians.

Suggested Sanitizers

KAY-5® Sanitizer/Cleaner (100 PPM)

Mix one packet of KAY-5® Sanitizer/Cleaner per 2.5 gallons of tap water [70°-100°F (24°-35°C)] according to manufacturer's instructions to ensure 100 PPM of available chlorine.

Household Bleach (200 PPM)

For 6% Sodium Hypochlorite bleach, mix 2.5 fl oz (75mL) in 5 gallons of tap water [70°-100°F (24°-35°C)]. For 5.25% Sodium Hypochlorite bleach, mix 2.2 fl oz (66mL) of bleach in 5 gallons of tap water [75°-95°F (24°-35°C)]. This will ensure a bleach solution of 200 PPM of available chlorine.

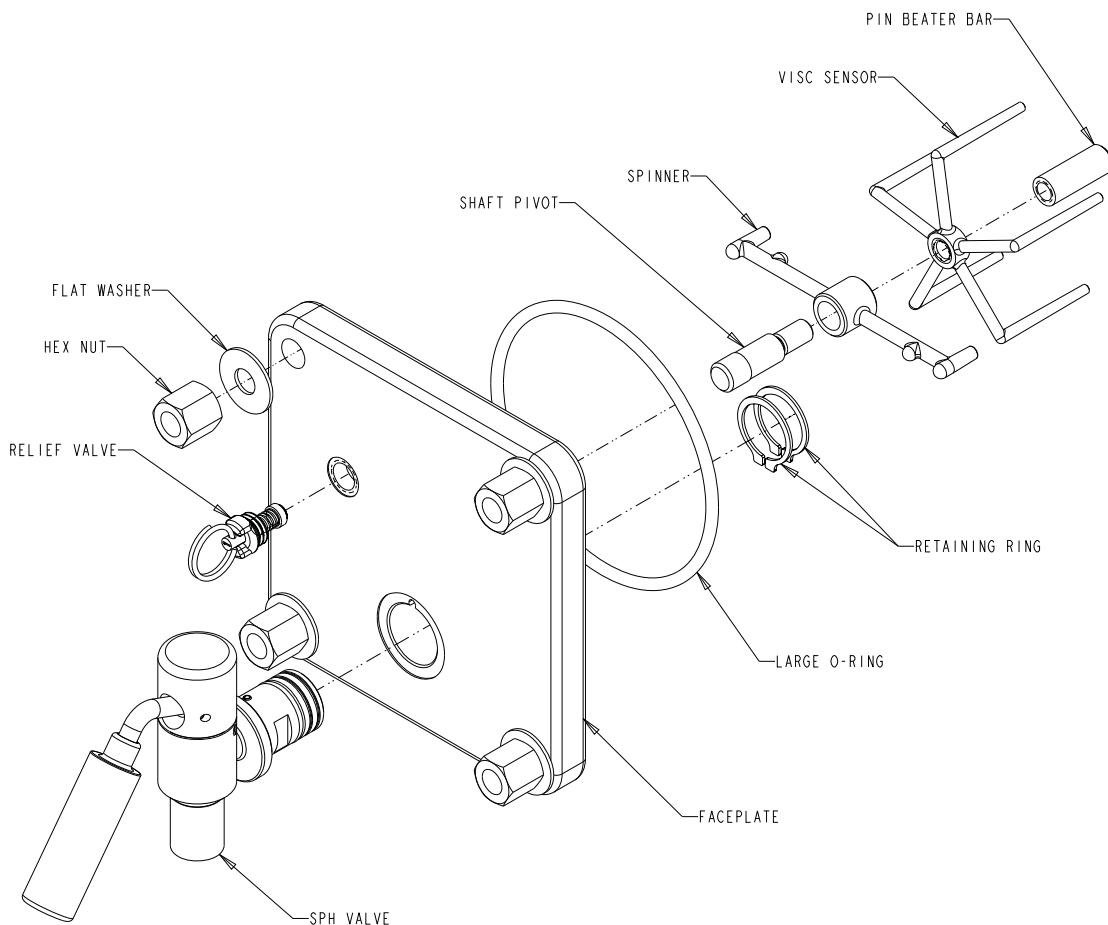


Figure 12.

Table 6.

Step	Action
1.	Defrost freeze cylinders, shut unit down, disconnect electrical power from Unit.
2.	Perform the procedure in Table 7 to empty the barrels.
3.	Remove the hex nuts and flat washers securing the faceplate to the freeze barrel, then remove the faceplate from the barrel.
4.	Carefully remove the large o-ring from the faceplate
5.	Unscrew the relief valve from the faceplate.
6.	Disassemble the dispensing valve (see Figure 12).
7.	Remove Ice Ball Grate from faceplate, if applicable.
8.	Wash all the parts in warm water. Remove all traces of syrup and lubricant, especially from the faceplate, o-rings, ice ball grate (if applicable), and dispensing valve. If parts are excessively coated, wipe clean with a paper towel to remove excess syrup and lubricant, especially from caged o-ring and dispensing valve. Use a brush (provided with the unit) to clean the faceplate relief valve passages.
9.	Submerge all the parts in a sanitizing solution according to the suggested sanitizers above for 10 minutes (no more than 15 min).
10.	Remove the parts from the sanitizing solution, rinse them with warm water, and place them on clean paper towels.
11.	Carefully re-install the valve and corresponding parts into the faceplate, and re-install the faceplate onto the machine.

NOTE: Use Dow-Corning DC-111 (P/N 321471000) light grade silicone lubricant to lubricate the faceplate O-ring.

Emptying a Barrel

To empty the barrel, perform the procedure in Table 7

Table 7.

Step	Action
1.	From the Barrel Status menu, press the DFRST button.
2.	When the barrel is defrosted, go to the Maintenance menu. If the security feature is active, access the Maintenance menu by pressing and holding the far left and right buttons simultaneously for approximately five seconds.
3.	Remove the splash panel. See "BRIX Setup Menu".
4.	Turn the Product/BRIX valve 90 degrees clockwise to shutoff product to the barrel.
5.	Place a large waste container under the dispense valve and drain as much product as possible from the barrel.
6.	When the pressure in the barrel drops, from the Barrel Maintenance menu, press the PURGE button to repressurize the barrel with CO ₂ . As product level lowers in the barrel, partially close the valve to avoid spurting.
7.	Disconnect the BIB from the unit.

NOTE: The unit should be sanitized every 180 days by a qualified service technician following the sanitizer manufacturer's recommendations.

Flushing the System of Syrup

After emptying the barrel, the barrel should be flushed of product before proceeding with the sanitizing procedure. Perform the procedure in Table 8.

Table 8.

Step	Action
1.	Fill a clean 5-gallon pail with plain water.
2.	Connect a sanitizing fitting (p/n cc 28688) to the BIB connector. Put the connector in the bucket of water.
3.	Make sure the Product/BRIX valve is in the BRIX position.
4.	Hold a waste container under the brix tube to collect syrup from the syrup line and open the manual syrup flow valve. to start filling the syrup line with plain water. Continue to hold the manual syrup flow valve open until clean water starts coming out of the BRIX tube.
5.	Release the manual syrup flow valve and turn the Product/BRIX valve to the Product position.
6.	Open the manual water flow valve to start filling the barrel with water. At the same time, open the faceplate relief valve until water comes out.
7.	When the barrel is full, press the SPIN button on the Barrel Status menu, while highlighting the appropriate barrel. This starts the scraper blade. Allow blade to operate for fifteen seconds.
8.	Turn barrel OFF by pressing the OFF button.
9.	Place a waste container under the barrel dispensing valve. Open the dispensing valve and dispense all wash water from the barrel. When the pressure in the barrel drops, from the Barrel Maintenance menu, press the PURGE button to re-pressurize the barrel with CO ₂ . As the wash water level lowers in the barrel, partially close the valve to avoid spurting.
10.	Perform rear barrel seal replacement. See "Barrel Motor Seal Replacement".
11.	Perform inspection and replacement of scraper blades. See "Inspecting and Replacing Scraper Blades".
12.	Perform a leak test on the barrel. See "Motor Seal Leak Test".

Sanitizing the Barrel

Sanitize the syrup system and barrel by performing the procedure shown in Table 9.

Table 9.

Step	Action
1.	Use a clean 5-gallon pall filled with a sanitizing solution and water at a temperature of 90° F to 110° F (32° C to 43° C). Prepare the sanitizing solution according to the instructions in the "Suggested Sanitizers" section above.
2.	Connect a sanitizing fitting (p/n cc 28688) to the BIB connector. Put the connector in the bucket of sanitizing solution.
3.	Make sure the Product/BRIX valve is in the BRIX position.
4.	Hold waste container under the BRIX tube to collect flush water from the syrup line and open the manual syrup flow valve to start filling the syrup line with sanitizing solution. Continue to hold the syrup flow valve open until sanitizing solution starts coming out of the BRIX tube.
5.	Turn the Product/BRIX valve in the Product position.
6.	Manually override (open) the syrup flow valve to fill the barrel with sanitizing solution.
7.	Fill the barrel with sanitizing solution by opening the faceplate relief valve until sanitizing solution comes out of the relief port.
8.	Hold a 16 oz. cup under the dispense valve. Hold the dispense valve fully open until the cup is full.
9.	Use the brush provided with the unit to clean the relief port and clean the outlet of the dispense valve with sanitizing solution.
10.	From the Barrel Status menu, press the SPIN button while highlighting the appropriate barrel. This starts the scraper blade. Allow blade to operate for minimum of 10, but no more than 15 minutes. Turn the scrapper blade off by pressing the OFF button.
11.	Place a large container under the dispense valve and drain as much sanitizing solution as possible from the barrel.
12.	When the pressure in the barrel drops, from the Barrel Maintenance menu, press the PURGE button to re-pressurize the barrel with CO ₂ . As sanitizing solution level lowers in the barrel, partially close the valve to avoid spurting.

Flushing the System

Flush the wash water from the system by performing the procedure in Table 10.



CAUTION:

Flush the system thoroughly, residual sanitizing solution left in the system may create a health hazard.

Table 10.

Step	Action
1.	Turn the Product/BRIX valve to the Product position.
2.	Manually open the manual water flow valve to start filling the barrel with wash water. At the same time, open the faceplate relief valve until water comes out.
3.	From the Barrel Status menu, press the SPIN button while highlighting the appropriate barrel. This starts the scraper blade. Allow the blade to operate for fifteen seconds, then turn barrel OFF by pressing the OFF button.
4.	To drain the water from the system, turn the barrel OFF.
5.	Place a container under the barrel dispensing valve. Open the dispensing valve and dispense all rinse water from the barrel. When the pressure in the barrel drops, from the Barrel Maintenance menu, press the PURGE button to re-pressurize the barrel with CO ₂ . As the wash water level lowers in the barrel, partially close the valve to avoid spurting.
6.	Remove the sanitizing fitting (p/n cc 28688) from the BIB connector and connect a BIB containing syrup to the syrup line.
7.	Rotate the Product/BRIX valve to the BRIX position and open the valve at the end of the tube.
8.	Hold a waste container under the BRIX tube to collect the sanitizing solution from the syrup line and open the manual syrup flow valve to start filling the syrup line with syrup. Continue to hold open the syrup flow valve until syrup starts coming out of the BRIX tube.
9.	Perform a BRIX setup. See "BRIX Setup Menu".
10.	Fill the barrel with product as described.
11.	Perform motor calibration. See "Calibrating a Motor"

CONTROL PANEL OVERVIEW

Behind the merchandiser is the control panel which includes the LCD display, shown in Figure 13. This panel controls all the functions of the unit including defrost cycles, viscosity control, sensing of supply pressures and the incoming line voltage as well as other functions and features.

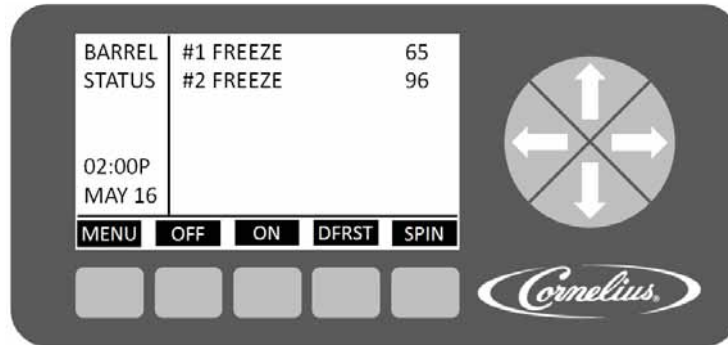


Figure 13.

SETTING UP THE CONTROL PANEL

When the unit is initially powered up, the Main Check menu, shown in Figure 15. is displayed.



Figure 14.

The software runs tests on the flash memory and the EEPROM. If they pass, PASS is displayed to the right of the appropriate line and the system displays the System Check State screen, shown in Figure 15.

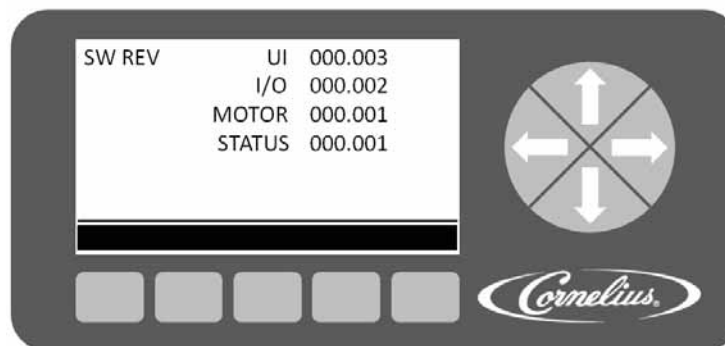


Figure 15.

Once the System Check State verification is complete, the display automatically displays the Barrel Status menu. This is the normal or home screen for the system when the unit is running properly. It shows the status of all barrels in the system, as shown in Figure 16. During initial power up, the barrel status is off, indicating that the unit is in idle mode, with refrigeration off, product delivery off and the barrel motor off.

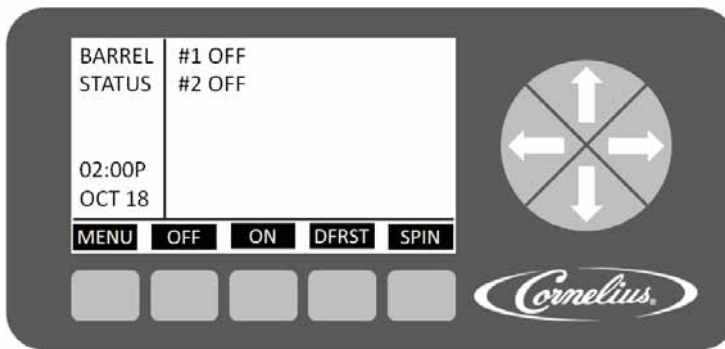


Figure 16.

From this screen, all the other screens may be accessed. The following procedures are required for initial setup of the unit.

- Set the Options
- Set the Clock
- Set the Sleep and Wake Times
- Set the Viscosity

Setting the System Options

The first items that should be set are the formatting options. These formatting options are located in the Option Setup menu. To access the Option Setup menu, press the MENU button on the Barrel Status menu. This displays the MAIN menu, shown in Figure 17. Then press the SETUP button to display the Option Setup menu, shown in Figure 18.

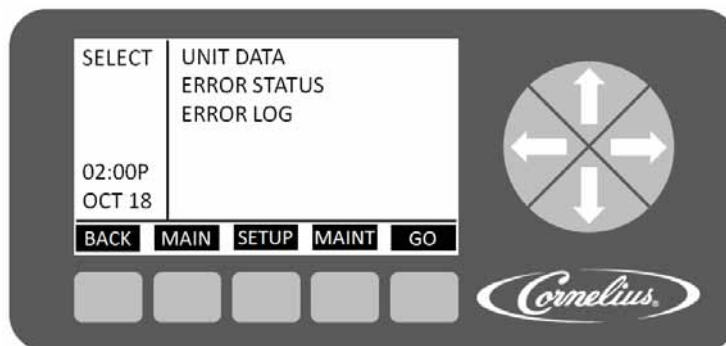


Figure 17.

Use the up and down arrows on the right side of the control panel to move between the various choices on the display. When the OPTION SETUP selection is highlighted, press the GO button to access the menu. The Option Setup menu (Figure 18.) is displayed.

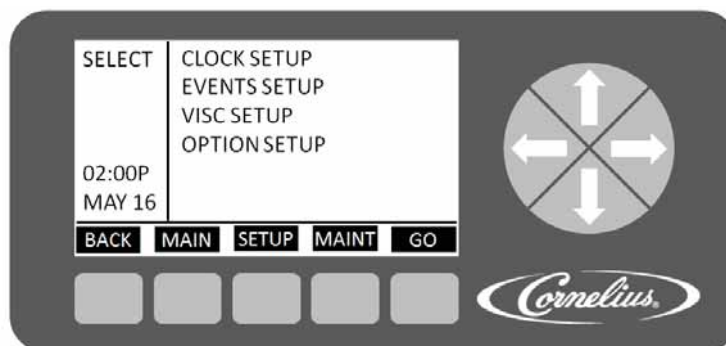


Figure 18.

Setting the Clock

Highlight the CLOCK SETUP field from the Select menu, shown in Figure 18. This displays the Clock Setup menu, shown in Figure 19. To set the time, perform the procedure in Table 11.

Table 11.

Step	Action	Procedure
1	Set clock time	Use the up and down arrows on the right side of the control panel to highlight the TIME display on the screen.
2	Select hour field	Use the left and right arrows to select the hour field
3	Set correct hour	Use the + or - buttons at the bottom of the display to set the proper hour.
4	Select minute field	Use the left and right arrows to select the minute field.
5	Set correct minute	Use the + or - buttons at the bottom of the display to set the proper minute.
6	Select AM/PM field	If the 12 hour clock option is selected, use the left and right arrows to select the AM/PM field.
7	Set AM/PM	Use the + button at the bottom of the display to set the AM/PM setting, if using 12 hour format.

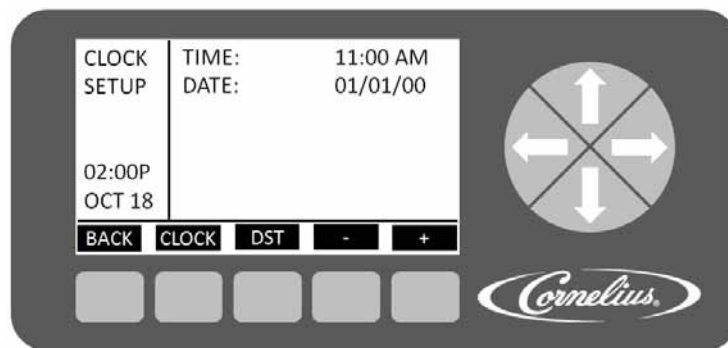


Figure 19.

To set the date, perform the procedure in Table 12. and refer to Figure 19.

Table 12.

Step	Action	Procedure
1	Set date	Use the up and down arrows on the right side of the control panel to highlight the DATE display on the screen.
2	Select month field	Use the left and right arrows to select the month field.
3	Set correct month	Use the + or - buttons at the bottom of the display to set the correct month.
4	Select day field	Use the left and right arrows to select the day field.
5	Set correct day	Use the + or - buttons at the bottom of the display to set the correct day.
6	Select year field	Use the left and right arrows to select the year field.
7	Set correct year	Use the + or - buttons at the bottom of the display to set the correct year.

Setting Daylight Savings Time

Once the date and time are set properly, the daylight savings time settings can be done. Display the Daylight Savings Time menu (Figure 20.) by pressing the DST button at the bottom of the display. To set daylight savings time, perform the procedure in Table 13.

Table 13.

Step	Action	Procedure
1	Set daylight savings time	Press the DST button at the bottom of the display to open the daylight savings time display, shown in Figure 20.
2	Select DST	Use the up and down arrows to select DST.
3	Set DST on	Use the + button to turn on daylight savings time.
4	Select SPRING MONTH	Use the up and down arrows to select SPRING MONTH.
5	Set SPRING MONTH	Use the + or - buttons at the bottom of the display to set the correct month.
6	Select SPRING WEEK	Use the up and down arrows to select SPRING WEEK.
7	Set SPRING WEEK	Use the + or - buttons at the bottom of the display to set the correct week. The choices are 1, 2, 3 or L.
8	Select FALL MONTH	Use the up and down arrows to select FALL MONTH.
9	Set FALL MONTH	Use the + or - buttons at the bottom of the display to set the correct month.
10	Select FALL WEEK	Use the up and down arrows to select FALL WEEK.
11	Set FALL WEEK	Use the + or - buttons at the bottom of the display to set the correct week. The choices are 1, 2, 3 or L.

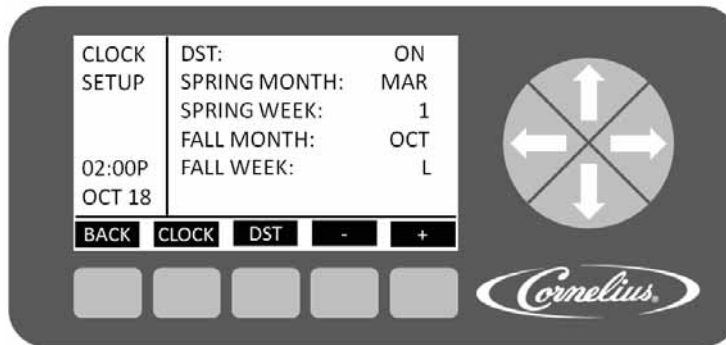


Figure 20.

When the daylight savings settings are complete, press the BACK button to save the settings and return to the Select menu, shown in Figure 18.

Options Setup Menu

The Option Setup menu allows the user to set the various options available in the system. These options are listed in Table 14. The functions of the display buttons change, depending on the highlighted selection on the Option Setup screen. The Option Setup menu is shown in Figure 21.

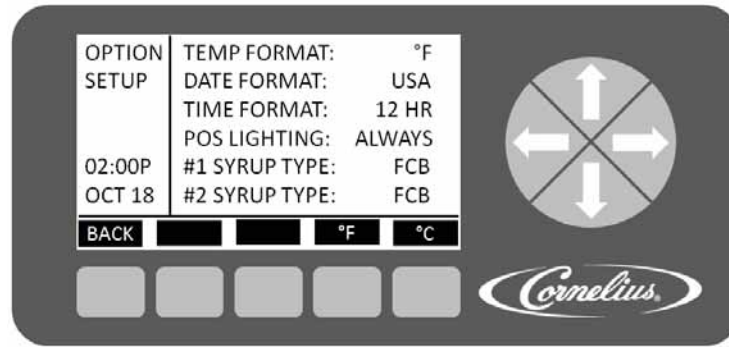


Figure 21.

Table 14.

Option	Button 2	Button 3	Button 4	Button 5
Temp Format			°F	°C
Date Format			USA	EURO
Time Format			12 HR	24 HR
POS Lighting		OFF	ALWAYS	SLEEP
#1 SYRUP TYPE	FCB	FCB-L	FUB	FUB-L
#X SYRUP TYPE	FCB	FCB-L	FUB	FUB-L

When all the options are set to the desired settings for the unit, press the BACK button to store these settings and return to the Select menu, shown in Figure 18.

Setting the Temperature Format

The temperature format displayed by the unit may be set to either Centigrade or Fahrenheit. Press the °F button to display readings in Fahrenheit and press the °C button to display readings in Centigrade.

Setting the Date Format

The date format can be displayed in either United States or European format. To display U.S. date format, press the USA button. This displays the date in mm/dd/yy format. Press the EURO button to display the date in dd/mm/yy format.

Setting the Time Format

Time format can be displayed in either 12 or 24 hour format. To display the clock settings in 12 hour format (1:08 P), press the 12 HR button. To display settings in 24 hour format (23:05), press the 24 HR button.

Setting the POS Lighting

POS Lighting is controlled by the POS LIGHTING field on the Option Setup menu (Figure 21.). To turn off the merchandiser lighting, press the OFF button while the POS LIGHTING field is highlighted. To turn on the merchandiser lighting permanently, press the ALWAYS button. To turn the merchandiser lighting on and off with the Sleep settings, press the SLEEP button.

Setting the Type of Syrup

Syrup type for each barrel may be selected by highlighting the desired barrel and pressing the appropriate button, FCB, FCB-L, FUB or FUB-L. FCB is for Frozen Carbonated Beverage, FCB-L is for Frozen Carbonated Beverages - Light (diet), FUB is for Frozen Non carbonated Beverages and FUB-L is for Frozen Non carbonated Beverages - Light (diet). Each of these settings provides the proper viscosity and temperature settings for the type of syrup being used.

Events Setup Menu

Events setup allows the user to set sleep periods for the unit and to lock out the defrost cycle during peak busy times. Sleep periods and defrost lockouts may be programmed for individual days of the week or for every day of the week, depending on location requirements.

Setting Defrost Lockout

From the Barrel Status menu, shown in Figure 16, press the MENU button and then press the SETUP button to display the Setup menu. Use the up and down arrows on the right of the control to highlight the Events Setup menu, then press GO to enter the menu (Figure 22).

This menu allows the user to set the unit for a sleep period on individual days or all days of the week. It also provides a lockout for the automatic defrost cycle, so that all barrels have product available during peak usage hours. The lockout can also be set day by day or for all days with up to three lockout periods per day. The defrost lockout affects all barrels in the unit. To set the defrost lockouts, perform the procedure in Table 15. Defrost lockouts should be overlapped by 15 minutes for sequential lockout.

Table 15.

Step	Action	Procedure
1	Set defrost lockout	Open the Events Setup menu, shown in Figure 22.
2	Select DAY	Use the up and down arrows to highlight DAY.
3	Set DAY	Use the + and - buttons at the bottom of the display to set the desired day or all days.
4	Select DEFROST LOCK 1	Use the up and down arrows to highlight DEFROST LOCK 1.
5	Set hour field	Use the left and right arrows to select the hour field. Use the + and - buttons at the bottom of the display to set the desired hour.
6	Set minute field	Use the left and right arrows to select the minute field. Use the + and - buttons at the bottom of the display to set the desired minute (in 15 min. increments).
7	Select AM/PM field	If the 12 hour clock option is selected, use the left and right arrows to select the AM/PM field. Use the + button at the bottom of the display to set the AM/PM field.
8	Save the setting	Press the BACK button at the bottom of the display to save the settings.
9	Select DEFROST LOCK 2	Repeat Steps 2 through 11 for the DEFROST LOCK 2 time, if desired.
10	Select DEFROST LOCK 3	Repeat Steps 2 through 11 for the DEFROST LOCK 3 time, if desired.

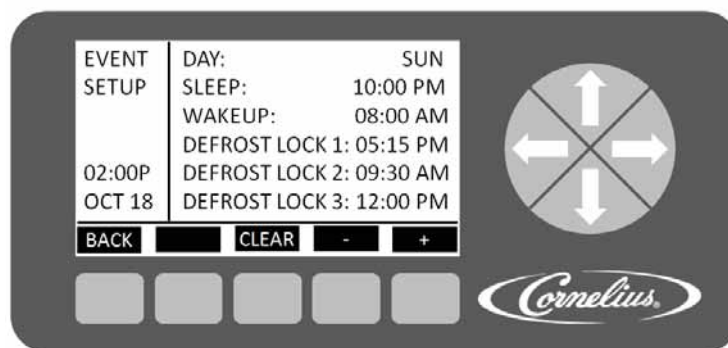


Figure 22.

When the defrost lockout settings are complete, press the BACK button to save the settings and return to the Select menu, shown in Figure 18.

Setting the Sleep and Wake up Times

Sleep and wake up times are set on the Event Setup menu shown in Figure 22. To set the sleep and wake up times, perform the procedure in Table 16.

NOTE: Setting the wake up time ahead of the sleep time on a given day causes the unit to go into the sleep mode for a week unless the operator initiates a manual wake up.

Table 16.

Step	Action	Procedure
1	Set sleep and wake up times	Open the Events Setup menu, shown in Figure 22. by pressing the GO button.
2	Select DAY	Use the up and down arrows to highlight DAY.
3	Set DAY	Use the + or - buttons at the bottom of the display to set the desired day or all days.
4	Select SLEEP	Use the up and down arrows to highlight SLEEP.
5	Set hour field	Use the left and right arrows to select the hour field.
6	Set minute field	Use the left and right arrows to select the minute field.
7	Select AM/PM field	If the 12 hour clock option is selected, use the left and right arrows to select the AM/PM field.
8	Select DAY for Wake up	Repeat Steps 1 through 3.
9	Select WAKEUP	Use the up and down arrows to highlight WAKEUP and repeat Steps 6 through 8 to set the WAKEUP times.
10	Set Wake up day/time	Repeat Steps 5 through 7.
11	Save the WAKEUP setting	Press the BACK button at the bottom of the display to save the wake up setting.

When the sleep and wake up settings are complete, press the BACK button to save the settings and return to the Select menu, shown in Figure 18.

Setting Viscosity

The viscosity maintained in the freeze barrels depends on the type of product being served. Some products are served best at a higher viscosity, while others require a lower viscosity for best quality. The Viscosity menu allows the user to adjust the viscosity in each barrel to the optimum setting for each type of syrup.

Refer to for Table 20. recommended settings based on syrup type.

Table 17.

Step	Action	Procedure
1	Set viscosity range	From the Setup menu (Figure 18.), open the Viscosity Setup menu, shown in Figure 23..
2	Select barrel	Use the up and down arrows to highlight the desired barrel.
3	Set range	Use the + or - buttons at the bottom of the display to set the desired range.
4	Select barrel	Repeat Steps 2 and 3 for each barrel in the machine.

To set all barrels in the system to the same viscosity setting, follow Table 17., and then press the ALL button at the bottom of the display while highlighting the viscosity setting you desire for all the barrels.

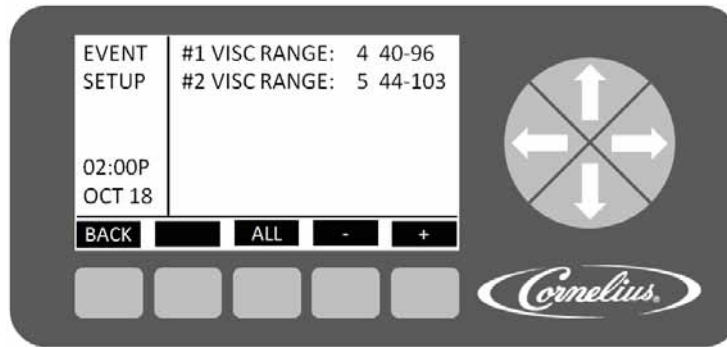


Figure 23.

When the viscosity settings are complete, press the BACK button to save the settings and return to the Select menu, shown in Figure 18.

NOTE: Refer to the service manual for other controller functions and features.

COMMISSIONING THE UNIT

UNIT LOCATION

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the unit.

Pressurizing the Water System

Perform the procedure in Table 18. to verify the water connection to the unit.

Table 18.

Step	Action
1	Turn on the water supply to the unit.
2	Check the system for leaks.
3	The Do Not Drink and Out of Product lights remain on. NOTE: The H₂O Out error does not clear until CO₂ pressure is applied.
4	Turn the product supply valve to the down (BRIX) position and open the valve at the end of the sample tube.
5	Place the end of the tube in a bucket.
6	Manually lift the water valve at the front of the unit (Figure 24.) to fill the water system.
7	When water flows from the sample tube, the system is full and you may proceed to Table 19. and pressurize the CO ₂ system.
8	Repeat Steps 4 through 7 for each barrel in the unit.

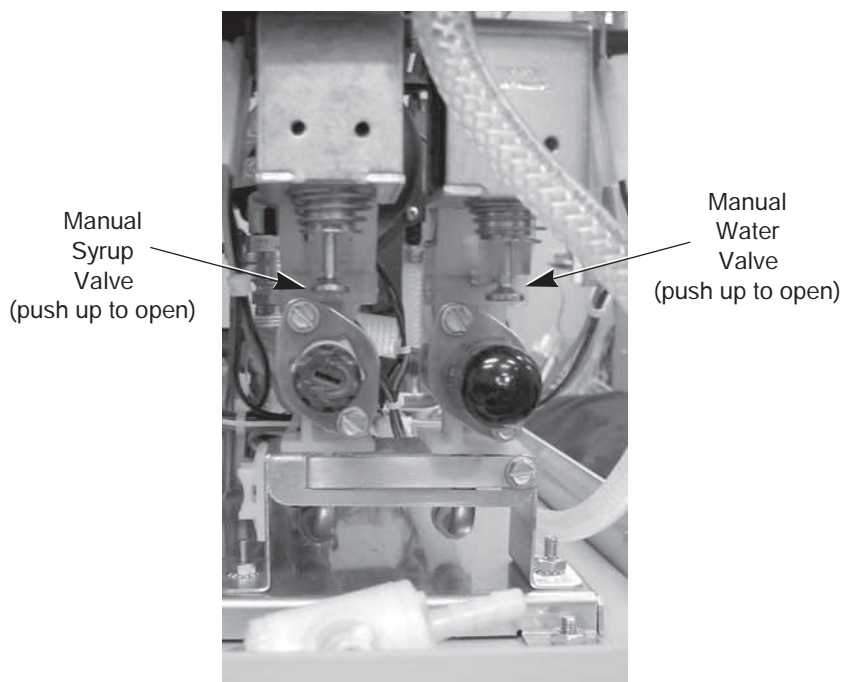


Figure 24.

NOTE: Remove the valve cover to access syrup and water valves.

Pressurizing the CO₂ System

The Viper unit is designed to operate on a CO₂ input pressure of 75 ±1 psig. If the installation location has either an independent tank and regulator or a bulk CO₂ supply that feeds more than one machine, a shutoff valve and secondary regulator must be placed in the line from the bulk supply to the Viper unit to reduce the CO₂ pressure at the unit to 75 ±1 psig. Perform the procedure in Table 19. to pressurize the CO₂ system.

Table 19.

Step	Action
1	Open the CO ₂ cylinder valve slightly to allow lines to slowly fill with gas. When lines are fully pressurized, open the CO ₂ cylinder valve all the way until it back-seats itself (this prevents leaks from the valve).
2	Adjust the CO ₂ cylinder regulator for the unit to 75 +/- 1psig at the unit. DO NOT TURN THE SYRUP CO₂ REGULATOR ON AT THIS TIME.
3	On the right side of the unit, verify that the expansion tank CO ₂ regulator is set to 30 psig, if not correct. NOTE: The expansion tank regulator should not be adjusted when pressure is applied to the barrels.
4	Check and set the CO ₂ barrel regulators (located on the front of the unit behind the splash panel) so that the pressure for each barrel is set to 36 psig for sugar based syrups.
5	The Do Not Drink and Out of Product lights remain on. The "H ₂ O Out" message should clear and the "Syrup Out" message displays.
6	NOTE: Check for CO₂ leaks by turning off the CO₂ supply to the Viper. Wait at least 3 minutes and check the CO₂ cylinder gauge to see if the pressure has dropped.
7	The Do Not Drink and Out of Product lights remain on.

Table 20. provides guidelines for machine settings based on general syrup type. Several factors, including syrup formulation, level of citric acids, etc, will impact settings. These settings are to provide initial adjustments to achieve product overruns in the 80-120% range.

Table 20.

Syrup Type	Syrup Type Set	Viscosity	Pressure	Expansion
FCB Syrup w/ Foaming Agent	FCB	4	36-38 PSIG	30
FCB Syrup w/o Foaming Agent	FCB	4	32-36 PSIG	30
FUB	FUB	3	N/A	30

NOTE: For citric syrups, adjust the CO₂ pressures down by 2-4 PSIG from the above to compensate for the lower CO₂ adsorption.

Pressurizing the Syrup System

Perform the procedure in Table 21. to pressurize the syrup system.

Table 21.

Step	Action
1	Slowly turn on the CO ₂ regulator for the syrup BIB pumps to avoid damaging them and set them so there is 75 psig, no lower syrup pressure at the unit.
2	Turn the product supply valve to the down (BRIX) position and open the valve at the end of the sample tube.
3	Place the end of the tube in a bucket.
4	Manually press the syrup valve at the front of the unit (Figure 24.) to fill the syrup system.
5	When syrup flows from the sample tube, the system is full.
6	Check the system for syrup leaks.
7	Repeat Steps 2 through 5 for each barrel in the unit.
8	Verify that the Do Not Drink and Out of Product lights go off on all barrels and the "Syrup Out" message clears.

Setting BRIX

BRIX is important to the quality of the final product. The BRIX menu provides a measured amount of product with a constant volume so that a BRIX comparison can be made between samples. The unit is set to provide a three second dispense of the product for BRIX testing.

Testing BRIX Level

The BRIX Setup menu is located on the Maintenance menu. The Maintenance menu is shown in Figure 25.

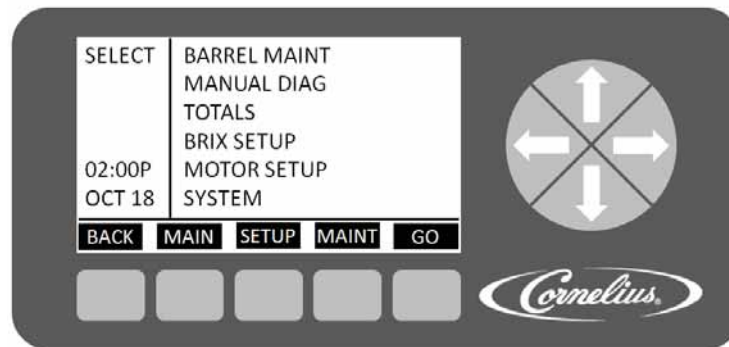


Figure 25.

The BRIX Setup menu facilitates the extraction of a sample of product from the unit for BRIX measurement. There is a three second dispense that produces a constant volume dispense so that BRIX comparison can be made between samples.

Table 22.

Step	Action
1	Remove the drip tray by sliding it forward off the mounting brackets.
2	Remove the splash panel behind the drip tray (if not removed).
3	Turn product supply valve to the Down (BRIX) position for the barrel you are going to test. (See Figure 26.)
4	From the Maintenance menu (Figure 25.), open the BRIX Setup menu. NOTE: Entering the BRIX Setup menu turns off all the barrels in the system.

Table 22.

Step	Action
5	Use the up and down arrows to highlight BRIX SETUP. Press the GO button at the bottom of the display.
6	Again use the up and down arrows to select the barrel you wish to perform BRIX on. NOTE: Pressing CANCEL will stop the process.
7	Locate the appropriate barrel sample tube and hold a cup under it.
8	Open the cap at the end of the sample tube. Press the BRIX button. The product pump will pump product for approximately 3 seconds. After the sample is dispensed Press the BRIX button twice more to dispense product two more times. Discard all three of these samples.
9	Press the BRIX button again. Collect a sample from the cup.
10	Place adequate amount of the sample on a refractometer and read the BRIX value. A target BRIX reading of 13.0 (±1.0) is normally desired for sugar-based syrups. Lower values for some diet syrups can be specified. Check with the syrup manufacturer if you are not sure.
11	If BRIX level needs to be adjusted, perform the Adjusting BRIX Level procedure in Table 23.
12	Manually press the water valve at the front of the unit (Figure 24.) in the middle of the water flow regulator to clean out the sample tube and close the valve at end of the sample tube.
13	Repeat this procedure for each barrel in the system.
14	Replace splash panel on unit.



Valves shown in Product position w/ Splash Panel Removed

Figure 26.

Adjusting BRIX Level

If the BRIX reading is out of its proper range, the syrup level should be adjusted to bring BRIX into the proper range. NEVER change the WATER FLOW CONTROL setting to adjust BRIX. The syrup flow control adjustment valve is shown in Figure 27. Perform the procedure in Table 23.

Table 23.

Step	Action
1	Remove the drip tray and the access panel behind it, if not already removed.
2	To increase the BRIX reading, turn the syrup flow control knob clockwise. Turn it counter-clockwise to decrease the BRIX reading. Never adjust the flow control more than 1/2-turn at a time.
3	Repeat steps 7 through 10 of Table 22. for each adjustment until the proper BRIX setting is achieved.
4	Manually press the water valve at the front of the unit (Figure 24.) in the middle of the water flow regulator to clean out the sample tube and close the valve at end of the sample tube.
5	Once the BRIX is properly set, turn the product supply valve to the upright (Product) position for the barrel you are testing. (See Figure 26.)
6	From the Barrel Maintenance menu, press the PURGE button to fill the barrel with CO ₂ .
7	Bleed the air from the face plate relief valves for 30 seconds each to remove air from the barrels.
8	Go to the Barrel Maintenance menu and press FILL to fill the barrel.
9	Fill the barrel by opening up the barrel faceplate relief valve for the barrel (See Figure 28.). Fill the barrel to the level shown in (approx. half way between the relief valve and the top of the barrel) for 80-120% overrun.
10	After finishing BRIX testing and adjustment for the first barrel, repeat this procedure for each of the other barrels, as required.
11	When BRIX adjustments are complete and all the air is purged from the system, replace the splash panel. NOTE: If any of the valve covers were removed during the process, make sure to replace them.

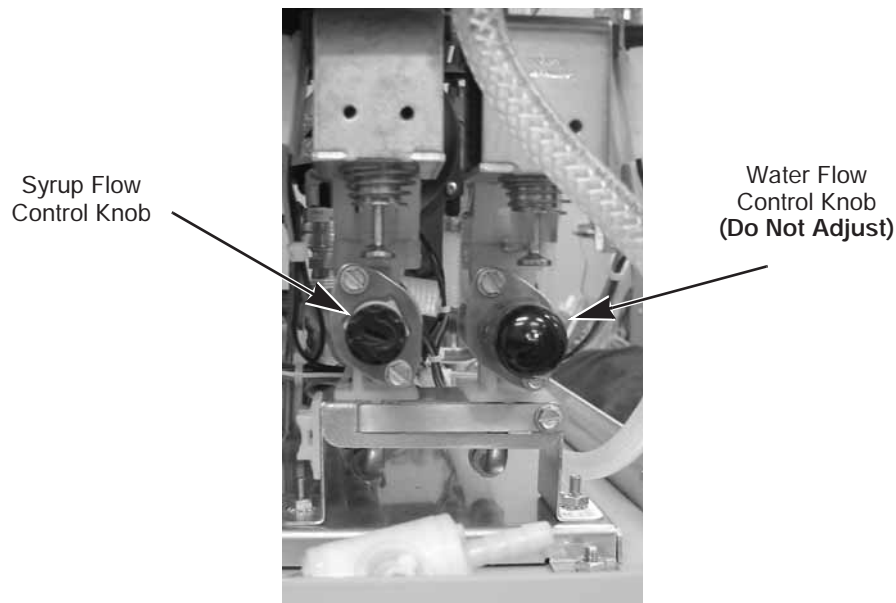


Figure 27.

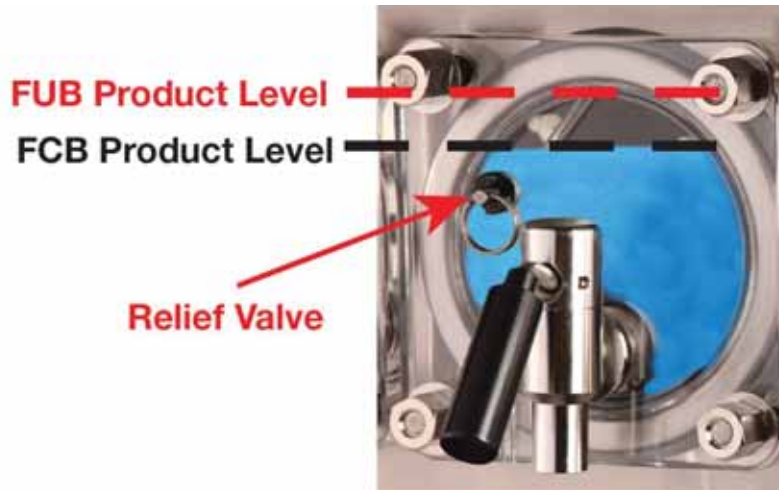


Figure 28.

Filling the Barrels

Once the barrels have been BRIXed and purged, they may be filled with product. This is accomplished by going to the Barrel Maintenance menu and pressing the FILL button. This starts the fill process for the highlighted barrel. As the barrel fills, the barrel pressure sensor shuts off the barrel at a pressure of 28 psi. To completely fill the barrel, open the relief valve on the faceplate of the barrel and allow some of the barrel pressure to escape. This allows the barrel to continue filling. Repeat this process until the product level is at the height indicated in based on product type. Once the product reaches the proper level, press the OFF button to stop filling the barrel. Press the FREEZE button to start mixing and cooling the product and the CO2 present in the barrel.

Calibrating a Motor

Motors are factory calibrated, but storage and transit can cause a shift in calibration. Calibration establishes a new baseline for the motor assembly. This allows the system to determine proper viscosity settings for the motor. As a part of installation, each barrel should be calibrated using the procedure in Table 24. and Table 25.



CAUTION:

Calibration must be performed when the product in the barrel is completely liquid. There must not be any ice on the scraper blade.

The Motor Setup Screen in Figure 29. allows you to select different motor types for each barrel in the unit and run the calibration procedure on that motor. This procedure correlates the actual viscosity of the barrel and its contents with the electrical characteristics of the motor. There are two options for Motor Type. Motor Type 1 is for 60 Hz units and motor type 2 is for 50 Hz units. The type of unit can be verified on the unit data plate. Perform the procedure described in Table 24. to verify the motor type setting.

NOTE: If the Motor Type shown is "DEFAULT", it indicates that the EEPROM is not installed or is faulty.

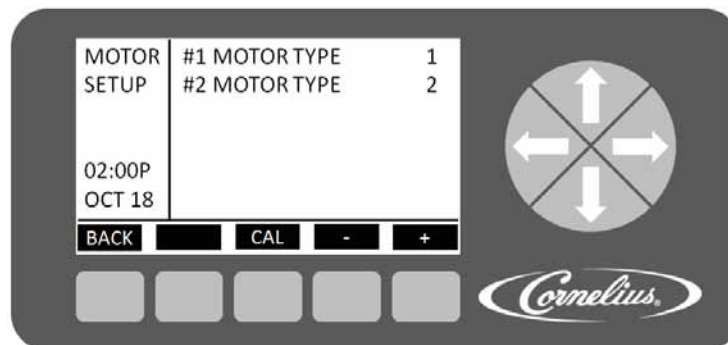
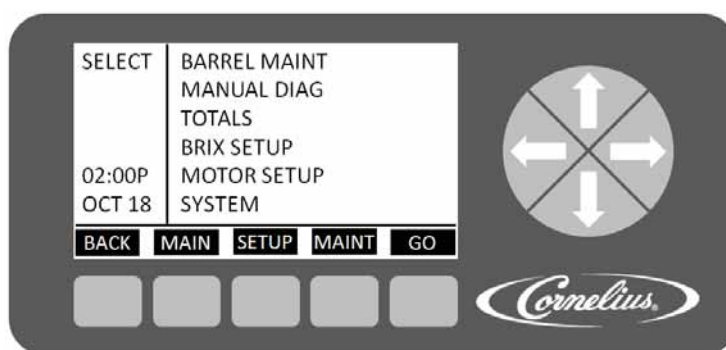


Figure 29. Motor Setup Screen

Table 24.

Step	Action	Procedure
1	Set barrel for Motor Type	From the Maintenance menu (Figure 30.), open the Motor Setup menu, shown in Figure 29.
2	Select the barrel	Use the Up and Down arrows to highlight the desired barrel
3	Select the proper motor type	Press the + or - buttons at the bottom of the display to set the motor type to 1 for 60 Hz or 2 for 50 Hz
4	Complete the procedure	Press the BACK button at the bottom of the display to save the settings and return to the Setup menu.


Figure 30. Select Screen
Table 25.

Step	Action	Procedure
1	Select Motor Setup	Use the Up and Down arrows to highlight MOTOR SETUP on the Maintenance menu.
2	Select the barrel	Use the Up and Down arrows to highlight the desired barrel
3	Start calibration	Press the CAL button at the bottom of the Motor Setup menu to start the calibration process. The calibration cycle continues for five (5) minutes to allow the gearbox to stabilize at temperature and ensure correct calibration. At that time the motor stops and it is calibrated.
4	Complete the procedure	Press the BACK button at the bottom of the display to return to the Maintenance menu.
5	Verify	Select SPIN to run the motor and visually ensure that the calibration reading is 20 +/- 2.

Security Menu

The security is enabled at the factory before shipping the Unit. It is recommended that security be remains enabled after installation.

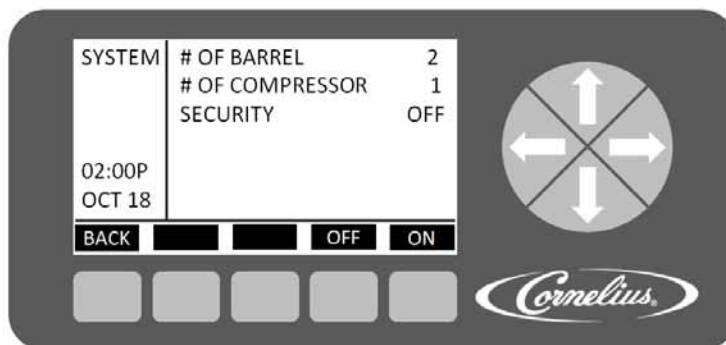


Figure 31.

Security Disabling: System security is located on the System menu. It allows a supervisor or service technician to keep unauthorized personnel from accessing the Maintenance menu. This feature is activated on the System menu. When security is turned on, users can only access the Main and Setup menus. The word LOCKED appears in the upper left corner of the display to inform users that security is enabled.

Pressing the extreme Left and Right buttons (Buttons 1 and 5) on the bottom of the display simultaneously and holding them for approximately five (5) seconds unlocks the Security menu. If security is left ON, on the System menu, when the system times out or when the user goes back to the Main menu, security is reactivated and the Maintenance menu is not accessible. To disable security, access the System menu, highlight Security and press the OFF button.

TROUBLESHOOTING

Problem	Probable Cause	Remedy
Unit will not run.	A. Unit not plugged in B. Circuit breaker	A. Plug in unit. B. Reset/replace circuit breaker
"Sleep" display on Barrel Status menu	A. Sleep time set B. Clock incorrectly set C. No or incorrect wake up time set	A. Check programming B. Check programming C. Check programming
Barrel Status OFF	A. Not activated B. Error has shut down barrels C. Unit in diagnostics	A. Turn barrels to ON or SPIN B. Correct error & turn barrels to ON C. Exit diagnostics & turn barrels ON
No water pressure	A. Water source not turned on B. Filter blocked C. Other	A. Turn on water B. Change filter C. Call Service



SPECIFICATIONS

Line Voltage:	215-245VAC
Max. Current Draw (FLA):	
2 Barrel Unit	16 amps
3 Barrel Unit	20 amps
4 Barrel Unit	20 amps
Max. Circuit Ampacity:	
2 Barrel Unit	20 amps
3 Barrel Unit	30 amps
4 Barrel Unit	30 amps
Syrup Tubing Size:.....	3/8 in. I.D., 75 ft.
Syrup Pressure:	75 psig (0.52 MPa)
Water Inlet Size:.....	1/2 in. I.D., 75 ft. max.
Water Flow Rate (2 barrel unit)	100 gal. per hr. at 25psig min. flowing pressure
Water Flow Rate (3 barrel unit)	100 gal. per hr. at 25psig min. flowing pressure
Water Flow Rate (4 barrel unit, low cap., single compressor)	100 gal. per hr. at 25psig min. flowing pressure
Water Pressure	25psig (0.17 MPa) min, 90 psig(0.62 MPa) max.
Ventilation Clearance, Standard Condenser	2" on both sides or back
.....	12" on top of the unit
Equipment Weight:	
2 Barrel Unit	410 lb.
3 Barrel Unit	465 lb.
4 Barrel Unit	500 lb.
CO ₂ Tubing Size:.....	3/8 in. I.D., 75 ft. max.
CO ₂ supply pressure to Viper should never exceed 75 psig (0.52 MPa)	
CO₂ Pressures:	
To Unit	75±1 psig
To BIB Pumps	75 psig see Table 26.
To Barrels.....	(36-40 psig typically for FCB)
To Expansion Tank (non-adjustable)	30 psig
Product Flow Rate:.....	2 oz./sec.
BRIX:	13 ±1 standard
Viscosity Setting Range	1-9
Height:	37 in.
Width:	
2 Barrel Unit	17 in.
3 Barrel Unit	22.75 in.
4 Barrel Unit	29 in.
Depth (including drip tray):.....	32.5 in.
Operating Temperature:.....	55° to 95° F

Table 26. Recommended Syrup Pump Pressure Settings for Various Line Runs

		BIB Pump Set Pressure (psi)									
Vertical Rise (ft)	25	85	85	85							
	20	80	85	85	85	85	85				
	15	80	80	80	80	85	85	85	85		
	10	75	80	80	80	80	80	85	85	85	85
	5	75	75	75	75	80	80	80	80	80	85
	0	75	75	75	75	75	75	75	80	80	80
		10	20	30	40	50	60	70	80	90	100
		Length of Run (ft)									

Cornelius Inc.
www.cornelius.com