



EV9799-02

SS-10 Cartridge

Inhibits mineral scale deposits and provides corrosion protection in water-fed equipment*



SS-10 Cartridge: EV9799-02

BENEFITS

Features Hydroblend™ compound, a unique blend that inhibits mineral scale deposits and provides corrosion protection in low flow water-fed equipment*

Patented design (patent no. 5,580,448) dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

Unaffected by high temperatures, permitting a wide variety of applications

Translucent cartridge allows simple visual monitoring of product usage and ensures against wasteful premature cartridge replacement

Integral feed cartridge fits most standard 10 inch housings*

SS-10 fits all current SR-X housings and all existing old style AR-X housings*

*Not performance tested or certified by NSF

INSTALLATION TIPS

Housing not included.

Fits standard 10" Housings. Order Model A-10 Clear Housing (EV9100-01) for temperatures less than 125°F*

Make sure selected housing fits temperature/pressure conditions

Install vertically with black O-band seal up

The SS-10 ScaleStick® cartridge cannot be installed into filter wraps

Flushing is not required for ScaleStick® cartridges

OPERATION TIPS

Deliming of equipment prior to application is recommended, but not required

Inspect ScaleStick® cartridges at least every 6 months

Replace ScaleStick® before Hydroblend™ compound is completely dissolved

Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation

APPLICATION/SIZING

For water-using equipment:*

Steamers and Combi-ovens
Ice Machines
Coffee and Espresso Machines
Proofers

SS-10 Cartridge

SPECIFICATIONS

Dimensions:

10.06"H x 1.31" Diameter

Service Flow Rate:

0.1 - 6 gpm*

Maximum Temperature:

150°F*


If inlet feed water temperature is above 125° F a hot water housing must be used.

Capacity: Approximately 6 months. Capacity will vary depending on application and water usage. On flow rates less than 1 gpm, capacities may be reduced*

*Not performance tested or certified by NSF

The ScaleStick® trademark is used pursuant to an agreement between PWC Enterprises and Everpure, Inc.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

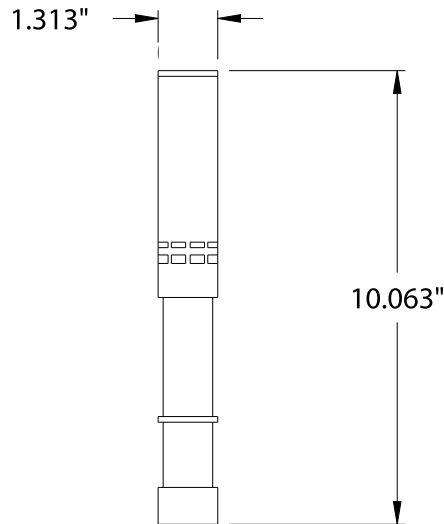

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



This SS-10 is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.
COMPONENT



EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE) S.A.
INDUSTRIEPARK WOLFSTEE
TOEKOMSTLAAN 30
B-2200 HERENTALS
BELGIUM
TEL 32 -14-283500
FAX 32-14-283505

In Japan:
EVERPURE JAPAN LLC
HASHIMOTO MN BLDG. 7F
3-25-1 HASHIMOTO SAGAMIHARA-SHI
KANAGAWA 229-1103
JAPAN
TEL 81-(0)42-775-3011
FAX 81-(0)42-775-3015

FILTER PURE SYSTEMS, INC.
5405 BORAN PLACE
TAMPA, FL 33610
Ph: 813-626-9600 Fax: 813-626-4800