#### iMIX®-3S+

Height: 33.6" Width: 12.6" Depth: 23.0" (85.3cm) (32.0cm) (58.4cm)



- 4.3gal (16.3L) hot water tank to meet peak serving times
- · High efficiency LED lighted front graphics for merchandising
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information
- Can be set as push and hold or single size portion control
- Capacity: Three 8lb (3.6kg) hoppers
- Cup clearance at 7.25" (18.4cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6cm)]
- Easily removable side panels for complete access to service components
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service set up and calibration
- · High speed heavy-duty whipper for complete product mixing
- Spring-loaded, all metal auger drive system for easy hopper installation
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second)

#### Agency:





#### **Specifications**

Product #: 38600.0050

Dispense: Portion Control

Dispense: Push Button

Hoppers: Three Water Access: Plumbed

Door: Top Hinge

### Additional Features

#### **Electrical & Capacity**

Volts*		Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
	120	15	1800	Yes	NEMA 5-15P	72	60°F (15.5°C)	1	2	50/60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements


	i lumbing requirements				
PSI		kPa	Fitting Supplied	Water Flow Required (GPM)	
	20-100	138-689	1/4" Male Flare Fitting	-	ľ

#### **CAD Drawings**

2D	Revit	KLC		
•	•	•		

MARNING:



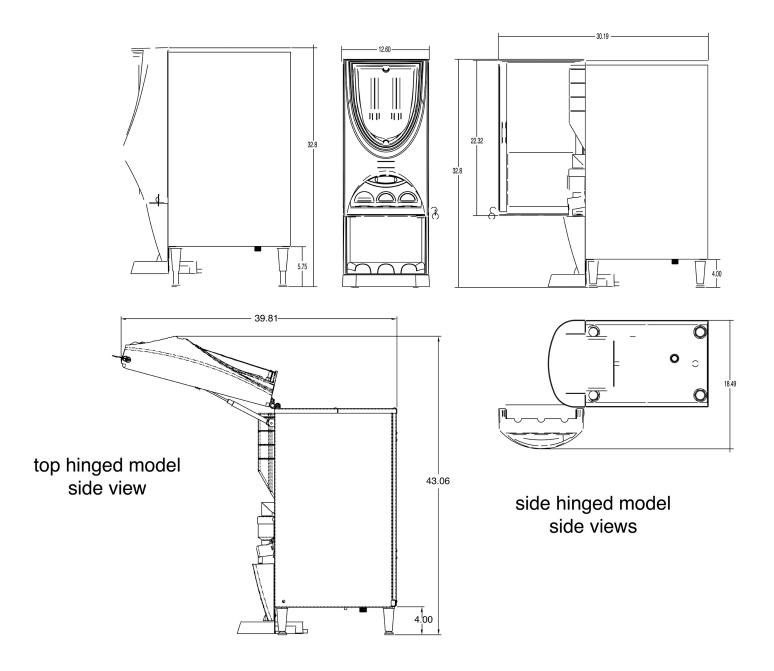

	Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume		
English	33.6 in.	12.6 in.	23.0 in.	41.7 in.	17.1 in.	29.5 in.	102.810 lbs	12.144 ft³		
Metric	85.3 cm	32.0 cm	58.4 cm	105.9 cm	43.3 cm	74.9 cm	46.635 kgs	0.344 m³		



## Related Products & Accessories:iMIX®-3S+(38600.0050)

























# Serving & Holding Options: iMIX®-3S+(38600.0050)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

