


2125 Series

APPLICATIONS

- Designed for dispensing Bag-in-Box syrups, juice concentrate (without pulp or particulate), teas, Bag-in-Box wines and liquor.
- Ideal for use in mobile carts and vending applications, where CO2 is not available.

SPECIAL FEATURES

- Built-in vacuum switch shuts off pump when bag is empty. When full bag is connected, pump will restart automatically.
- Pressure switch allows pump to turn on and off automatically when dispensing valve is opened or closed.
- Self-priming up to 6 ft. (1.8 m).
- Runs dry without damage.

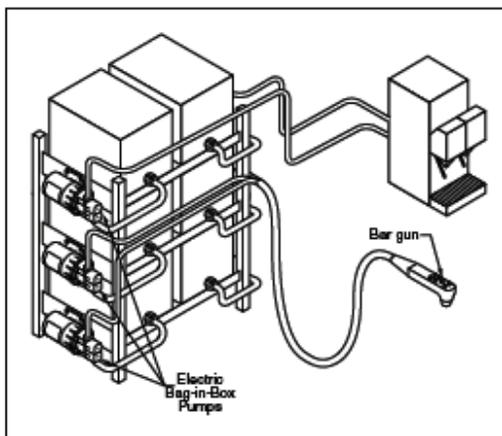

STANDARD MODEL NUMBERS

Model Number	Voltage	Pressure Switch	Operational Flow
2125-030	115 Volt AC	50 psi max. (3.4 bar)	1 oz./sec. (28.5 ml./sec.)
2125-507	115 Volt AC	80 psi max. (5.2 bar)	0.5 oz./sec. (14.8 ml./sec.)
2125-230	230 Volt AC	50 psi max. (3.4 bar)	1 oz./sec. (28.5 ml./sec.)
2125-508	230 Volt AC	80 psi max. (5.2 bar)	0.5 oz./sec. (14.8 ml./sec.)

SPECIFICATIONS

Pump Design:	Double diaphragm
Ports:	1/4" NPT, female
Motor:	Permanent magnet with solid state rectifier
Cycles:	50/60 Hz
Recommended Duty Cycle:	25%
Approvals:	NSF Standard 18 UL listed
Warranty:	1 Year

Note: If inlet exceeds 30 PSI, pump requires 30 PSI water pressure regulator. See page 11.

Note: Not available in Europe.

The above graphics and specifications were copied from the 2009 Flojet Product Catalog and is unedited. As a distributor for Flojet, we are providing the product details as provided by the manufacturer.