



IMD-600-90

Ice Maker Dispenser



Features:

- CFC-free, R404-a refrigerant
- High quality, high production capacity in less than 24" of counter space
- CFC-free foam insulation
- Produces extruded, chewable ice preferred by consumers
- Patented design – easy to perform preventative maintenance
- Ice maker uses 100% of water
- Ideal for healthcare or foodservice application
- Cube size 1/2"W x 1/2"H x 1/2"D



Technical Specifications:

Compressor: 3/4 H.P.

Refrigerant: CFC-Free, R-404a

Ice Bin Storage Capacity: 90 lbs. (40.86 kgs.)

Ice Production Capacity (60 cycle):

- 618 lbs. @ 70°F Air/50°F Water
(280 kg @ 21.1°C Air/10.0°C water)
- 493 lbs. @ 90°F Air/70°F Water
(223.62 kg @ 32.2°C Air/21.1°C water)
- (50 cycle produces 83% of above stated production capacities)

Cabinet Construction: Stainless steel


Dimensions:

- 24" (60.96 cm) wide
- 28 1/2" (72.39 cm) deep
- 41" (104.14 cm) high


Minimum Circuit Amps: 15

Shipping Weight: 314 lbs. (143 kgs.)

Agency Listings:

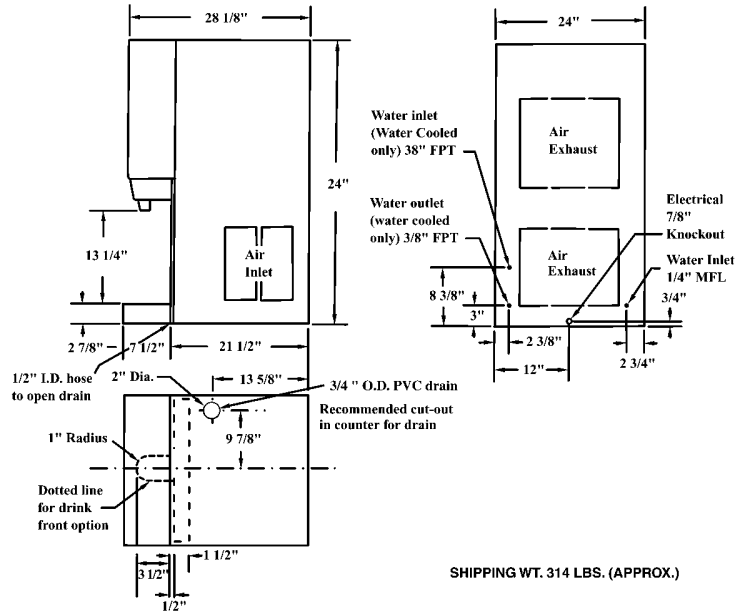

ICE MAKING CAPACITIES

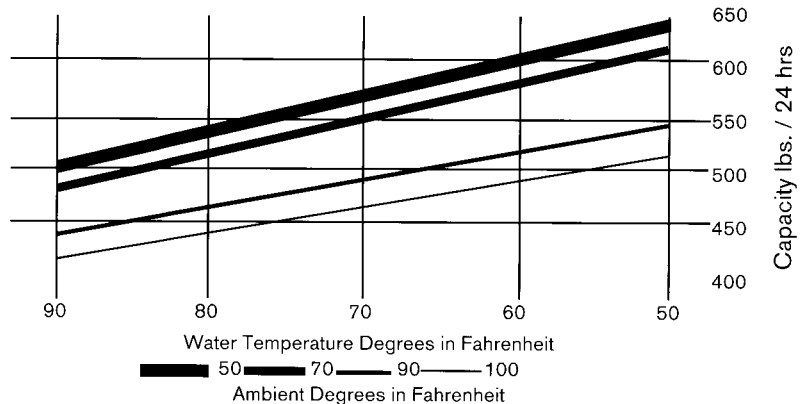

Part Number	Model Number	Dispensing Method	Standard Electrical	Condenser	Production 70°/50° lbs./kgs.
638090601	IMD-600-90ASPB	Push button	115 / 60 / 1	Air	618 lbs. / 280 kgs.
638090651	IMD-600-90WSPB	Push button	115 / 60 / 1	Water	618 lbs. / 280 kgs.
638090605	IMD-601-90ASPB	Push button	220-230 / 60 / 1	Air	618 lbs. / 280 kgs.
638090603	IMD-602-90ASPB	Push button	220-240 / 50 / 1	Air	515 lbs. / 233 kgs.



For more information or to place an order, contact your sales representative or authorized distributor.

In the US:

Phone: 1-800-238-3600

Fax: 1-800-535-4235

Outside the US:

Phone: 1-763-421-6120

Fax: 1-763-422-3297

IMI Cornelius Inc.

One Cornelius Place
Anoka, MN 55303-6234
USA